

# ALTERNATOR PULLEYS



EDITION 2017

**BOSCH**



**391001**

**REPLACES:** 1-126-600-524, -934, -945, -950;  
1-126-601-524; VW: 028-903-119-1, -119F  
**DIMENSIONS:** 50.0 mm OD x 17.0 mm Bore, 6-Groove.  
**APPLICATION:** VW Cabrio, Golf/ Jetta, Passat, Van.  
**Bosch 12W/ 60-120 Amp. Alternators.**  
**ALTERNATOR #S:** 0-120-335-010; 0-120-465-020;  
**0-120-485-020**, -034, 038, -043, -046;  
**0-123-310-001**, -002, -007, -019, -020;  
**0-123-315-001**, -002; **0-123-320-001**, -002, -003,  
-006, -007, -009; 0-123-325-005; **0-123-340-001**,  
-002, -003; **0-123-505-005**, -011; **0-123-510-001**,  
-006, -008, -009, -054; **0-123-515-011**, -014;  
0-123-540-001; AL0181X, AL0183X, AL0184X,  
AL0185X, AL0186X, AL0187X, AL0723X.  
**LESTER #S:** 13380, 13381, 13382, 13441, 13605, 13606,  
13622, 13833, 21251, 22775, 23677, 23747.



**391002**

**REPLACES:** 1-126-601-562, **F-00M-991-140**, -289;  
Saab: 12770125.  
**DIMENSIONS:** 52.0 / 57.0 mm OD x 17.0 mm Bore,  
62.0 mm OL / 6-Groove.  
**APPLICATION:** Saab 900, 900S, 900 Turbo, 9-3 2.0L,  
2.3L 2002, 9-5 2.3L 2002-2004.  
**Bosch 12W/ 70-140 Amp. Alternators.**  
**ALTERNATOR #S:** 0-123-310-041; 0-123-320-057;  
0-0123-325-007; **0-123-335-004**, -005;  
**0-123-510-042**, -094, -096; 0-124-525-016;  
AL0037X, AL0781X, AL0782X, AL0813X.  
**LESTER #S:** 13610, 13807, 13952.




**391003**

**DIMENSIONS:** 82.0 mm OD x 30.0 mm Bore,  
58.0 mm OL / 12-Groove.  
**APPLICATION:** Converts Delco D50N Type Alternators  
to Bosch T1 Type Alternators.



**391004**

**8 GROOVE LITENS RotorRx ISOLATOR DE-  
COUPLER PULLEY**  
**REPLACES:** 1-126-601-596; John Deere: AL156091,  
AL166836, L12669, L112969; Tendeco: 920650;  
IKA: 353601, 353701.  
**DIMENSIONS:** 52 mm / 56.8 mm OD x 17 mm Bore,  
70.0 mm OL, 8-Groove.  
**APPLICATION:** John Deere Farm Applications.  
**Bosch 12W/ 90-115 Amp. Alternators.**  
**ALTERNATOR #S:** 0-123-315-501; 0-124-512-500.  
**LESTER #S:** 12370, 12379.




**391005**

**7-GROOVE LITENS RotorRx IDP**  
**REPLACES:** **F-00M-991-078**, -116, -192; Litens: 920574;  
INA: 535007010; Ford: YC1T-10A352-AC,  
YCIU-10A352-BA; IKA: 335621, 353931.  
**DIMENSIONS:** 39.0 mm L x 17.0 mm Bore x 59.0 mm /  
62.0 mm OD x 25.2 mm Belt, 7 Groove, 5 mm  
from Hub to Center of 1st Groove.  
**APPLICATION:** Ford Transit 2.0L / 2AL  
**Bosch 75-110 Amp. IR Alternators.**  
**ALTERNATOR #S:** **0-124-315-019**, -027, -100.  
**LESTER #S:** 21890.




**391006**

**6 GROOVE CLUTCH PULLEY W/ FREE WHEEL**  
**REPLACES:** 1-126-601-565; F2253554, F2253555;  
535000110; IKA: 335171; VW: 028-903-119AA.  
**DIMENSIONS:** 40.65 mm L x 17.0 mm Bore x  
55.0 mm OD x 14 mm H x 21.0 mm Belt.  
**APPLICATION:** VW Cabrio, Eurovan, Golf / Jetta,  
Passat. **Bosch 70-120 Amp. IR Alternators.**  
**ALTERNATOR #S:** 0-123-310-049, 0-123-320-038;  
0-123-515-017, 0-123-515-020; AL0186X.  
**LESTER #S:** 21392, 23770, 23771.



**391007**

**6 GROOVE CLUTCH PULLEY W/ FREE WHEEL**  
**REPLACES:** **F-00M-991-002**, -122, -206, -284; F227628,  
F553470, 535001210; Hitachi: GD214998-1;  
IKA: 33530-1; Valeo: 593515, 593600, 593999;  
VW: 022-903-119A, 038-903-119A, -119T.  
**DIMENSIONS:** 42.5 L x 17.0 Bore x 61.5 / 56 OD (mm),  
21 mm Belt, M16 x 1.5 Thread, 6 Grooves.  
**APPLICATION:** Audi A3-TT, VW Beetle-Eos-Golffletta-  
Passat, Dodge Journey, Ford Galaxy.  
**Bosch 70-180 Amp. IR Alternators.**  
**ALTERNATOR #S:** 0-120-000-015; **0-121-715-003**,  
-047; **0-124-315-001**, -013, -032; **0-124-325-001**,  
-012, -047, -073, -083, -101, -130, -131;  
**0-124-515-010**, -022, -101, -117, -121, -125;  
**0-124-525-027**, -039, -050, -066, -067, -090, -091,  
-092; **0-124-615-017**, -038; AL0731X, AL0732X,  
AL0849X, AL9352X; Hitachi: LR1 120-701.  
**LESTER #S:** 11134, 11221, 11360, 11361, 11586, 13849,  
13851, 13853, 13942.  
**NOTE:** This is the same Pulley as Valeo's 39313.




**391008**

**6 GROOVE CLUTCH PULLEY W/ FREE WHEEL**  
**REPLACES:** **F00M-147-735**, **F00M-991-105**; F233525,  
535002510; Porsche: 955-603-152-00,  
996-603-152-50, 997-603-154-00; IKA: 335451.

(391008 Cont'd)

**DIMENSIONS:** 37.8 mm L x 17.0 mm Bore x 53.0 /  
61.0 mm OD x 21.0 mm Belt, 6 Groove.  
**APPLICATION:** Porsche Boxter 3.2L-Carrera S 34L-  
911 3.6L-Cayman 34L, Volvo Cross Country  
AWD 2.5L- C70 S40 S60 S70 -V40 -V70 -XC90.  
**Bosch 120-160 Amp. IR Alternators.**  
**ALTERNATOR #S:** 0-124-515-073; **0-124-525-021**,  
-029, -057, -060; 0-124-625-024;  
Bosch Reman.: AL0812X, AL0815X, AL0820X.  
**LESTER #S:** 11041, 11130, 13998.




**391009**

**6 GROOVE CLUTCH PULLEY W/ FREE WHEEL**  
**REPLACES:** **F-00M-991-016**, -061, 156, -232;  
**F-00M-147-716**, -799; F2304011.6, 535007210;  
N0922; Volvo: 30667878, 30737517, 8676496,  
867497, 94597473; IKA 33576-1.  
**DIMENSIONS:** 6 Groove, 34.5 mm L x 17.0 mm Bore x  
56.0 / 61.0 mm OD x 21.0 mm Belt, CCW  
Rotation, 5.5 mm from Hub to Center of 1st  
Groove, M16 x 1.5 Thread.  
**APPLICATION:** Chrysler, Volvo C70, S40, S60, S70,  
V70, XC90. **Bosch 115-140 Amp. Alternators.**  
**ALTERNATOR #S:** **0-124-515-019**, -054; 0-124-525-014;  
0-124-625-003; AL0805X, AL0820X, AL0823X.  
**LESTER #S:** 11081, 13801, 13998.



**391010**

**6 GROOVE CLUTCH PULLEY W/ FREE WHEEL**  
**REPLACES:** 1-126-601-559, -564, 1-127-011-844, -845;  
F00M-991-388; INA: F2268044, 535001010;  
61K10108; IKA: 335161; VW: 038-903-119,  
038-903-165, 028-903-165A.  
**DIMENSIONS:** 6 Groove, 42.5 mm L x 17.0 mm Bore x  
56.0 / 61.0 mm OD x 21.0 mm Belt, 14.5 mm from  
Hub to Center of 1st Groove, M16 x 1.5 Thread.  
**APPLICATION:** Audi A3, VW Beetle-Golf 1.9L Diesel.  
**Bosch 70-120 Amp. Alternators.**  
**ALTERNATOR #S:** 0-123-310-034, -035; **0-123-320-032**,  
-059; 0-123-505-011; **0-123-510-047**, -099;  
**0-123-515-014**, -018, -021; AL0723X.  
**LESTER #S:** 13622, 13831, 13832, 13833, 21391, 22707.



**391011**

**6 GROOVE CLUTCH PULLEY W/ FREE WHEEL**  
**REPLACES:** 1-126-601-568, 6-033-GD5-036; F225644.7,  
F228215, F561338, 535000310, 535001310;  
IKA: 335181; Mercedes: 602-150-00-60,  
604-150-00-60, 604-150-03-60; Valeo: 593495.  
**DIMENSIONS:** 6-Groove, 37.3 mm L x 17.0 mm Bore x  
56.0 / 61.0 mm OD x 21.0 mm Belt, 15 mm from  
Hub to Center of 1st Groove, M16 x 1.5 Thread.  
**APPLICATION:** Mercedes Sprinter 2.3L / 2.9L, C280,  
C36, E300D, E300TD, G-Class, S300 Turbo,  
OM602 Engine Trucks Applications.  
**Bosch 55-115 Amp. Alternators.**  
**ALTERNATOR #S:** **0-123-320-041**, -046; **0-123-510-038**,  
-049, -080, -101; 6-033-G30-40B, **6-033-GB3-030**,  
-031, -040; AL0164X, AL0765X, AL0767X.  
**LESTER #S:** 13793, 13811, 13972, 22902.

(391008 Cont'd)


**BOSCH**



**391012**

**6 GROOVE CLUTCH PULLEY W/ FREE WHEEL**


**REPLACES:** F-00M-991-108, -266; F00M-147-732, 120936706; F2311421, 535004110; IKA: 334771; Valeo: 593778, 2549858, 2604099, 2604510; VW: 06B-903-016P-119B.  
**DIMENSIONS:** 6 Groove, 35.6 mm L x 170 mm Bore x 56.0 mm / 62.0 mm OD x 22.7 Belt, 12.9 mm from Hub to Center of 1st Groove, M16 Thread.  
**APPLICATION:** Audi A4 1.8L, A4 1.8L Quattro, A4 Avant 1.8L **Bosch 120-150 Amp. Alternators.**  
**ALTERNATOR #'S:** 0-124-515-059; 0-124-525-009, -088; 0-124-615-009; Valeo: SG12B075, SG14B016.  
**LESTER #'S:** 11064, 23115, 23116, 23255, 23256.



**391013**

**7 GROOVE CLUTCH PULLEY W/ FREE WHEEL**


**REPLACES:** Valeo: 595258; INA: F557311, 535016510; IKA: 3-5392-1; Mercedes: 271-155-012-15; Litens: 59919.  
**DIMENSIONS:** 7 Groove, 49.7 mm L x 170 mm Bore x 55.7 / 60.0 mm OD x 26.2 mm Belt, 194 mm from Hub to Center of 1st Groove, M16 x 1.5 Thread.  
**APPLICATIONS:** Mercedes C230 1.8L 2003-2005, E200 1.8L, CLK200 1.8L, SLK200 1.8L.  
**Valeo 120-150 Amp. IR/IF Alternators.**  
**ALTERNATOR #'S:** SG12B062, TG12C026, TG15C075.  
**LESTER #'S:** 11066, 23285.



**391014**

**6 GROOVE CLUTCH PULLEY W/ FREE WHEEL**


**REPLACES:** F-00M-991-099, -125, -190, -303; INA: F-233197.2, F559320, 535005010; Mercedes: 611-155-03-15, -05-15, -07-15; Valeo: 2549800; IKA: 335571.  
**DIMENSIONS:** 6 Groove, 40.5 mm L x 170 mm Bore x 50.0 / 55.0 mm OD x 21.0 mm Belt, 13.5 mm from Hub to Center of 1st Groove.  
**APPLICATION:** Dodge Sprinter Van 2.7L 2003-2004, Freightliner Sprinter Van 2.7L Diesel 2000-2004.  
**Bosch 90-150 Amp. Alternators.**  
**ALTERNATOR #'S:** 0-124-325-039, -046, -077, -093, -105, -170; 0-124-515-061, -064, -084, -091, -102, -114, -115, -118; 0-124-615-015, -018, -019, -025, -032, -033, -035, -042; 0-124-625-006, -020, -022; AL0791X, AL0798X, AL0801X, AL0817X.  
**LESTER #'S:** 12382, 12383, 12384, 12385, 22155, 23021.



**391015**

**8 GROOVE CLUTCH PULLEY W/FREE WHEEL**


**REPLACES:** 6-033-GC5-009; INA: F238216, F552296, 535006810; Mercedes: 271-155-00-16; 906-155-02-15, 906-155-12-15; IKA: 335691.  
**DIMENSIONS:** 8 Groove, 39.2 mm L x 170 mm Bore x 57 / 61.8 mm OD x 26.3 mm Belt, 8.3 mm from Hub to Center of 1st Groove, M16 Thread.  
**APPLICATION:** Mercedes Trucks (OM904, OM906).  
**Bosch 24V / 100 Amp. I/R Alternators.**  
**ALTERNATOR #'S:** 0-120-468-143, -145; 6-033-GB3-023.  
**LESTER #'S:** 12388.



**391017**

**8 GROOVE CLUTCH PULLEY W/FREE WHEEL**

**REPLACES:** 1-126-601-102; INA: F230283, F238215.02, 535007810; Mercedes: 906-155-03-15, -13-15, 906-155-21-15; IKA: 335611.  
**DIMENSIONS:** 8 Groove, 39.5 mm L x 17 mm Bore x 70.8 / 79.0 mm OD x 27.5 mm Belt, 5 mm from Hub to Center of 1st Groove, M16 Thread.  
**APPLICATION:** Mercedes Trucks (OM904, OM907).  
**Bosch 24V / 80 Amp. Alternators.**  
**ALTERNATOR #'S:** 0-120-469-115, -117, -118; 0-121-545-702, G-033-GB3-027.  
**LESTER #'S:** 12386.



**391018**

**7 GROOVE CLUTCH PULLEY W/ FREE WHEEL**

**REPLACES:** F00M-991-167; INA: F235449, 535008310; IKA: 353131; Delphi: 10493077; Valeo: 2604505; Hitachi: GD115070, GD217756; VW: 021-903-119J.  
**DIMENSIONS:** 7-Groove, 34.9 mm L x 170 mm Bore x 55.7 / 61.0 mm OD x 24.3 mm Belt, 8.0 mm from Hub to Center of 1st Groove, M16 x 1.5 Thread.  
**APPLICATION:** Audi Q7 3.6L, Porsche 911, Cayenne, VW Touareg 3.2L / 3.6L **Bosch 150 Amp. / Valeo 180 Amp. / Hitachi / Delco Alternators.**  
**ALTERNATOR #'S:** 0-124-615-026; AL0837X; Valeo: TG17C039, FG18S036, FG18T041, FG23S025, FG23S028; Hitachi: LR1190-908B.  
**LESTER #'S:** 11061, 11245, 11281, 23346.



**391019**

**5 GROOVE LITENS RotorRx ISOLATOR DECOUPLER PULLEY**


**REPLACES:** F00M-991-139; Tendeco: 920629; INA: 535007130; IKA: 335721; Saab: 12786853.  
**DIMENSIONS:** 5 Groove, 42.5 mm L x 170 mm Bore x 54.0 / 60.0 mm OD x 184 mm Belt, 17.5 mm from Hub to Center of 1st Groove, M16 x 1.5 Thread.  
**APPLICATION:** Saab 9-3 2.0L with M/T 2003-2004.  
**Bosch 100-140 Amp. IR Alternators.**  
**ALTERNATOR #'S:** 0-124-415-026; 0-124-425-033, -040, -048; 0-124-515-096; 0-124-525-017.  
**LESTER #'S:** 11043, 11186.



**391020**

**6 GROOVE LITENS RotorRx IDP**


**REPLACES:** F00M-991-289; Tendeco: 920850; IKA: 353651; Saab / Scania: 12770125.  
**DIMENSIONS:** 6 Groove, 63.5 mm L x 170 mm Bore x 55.5 / 52.5 mm OD x 22.5 mm Belt, 40.5 mm from Hub to Center of 1st Groove, M16 Thread.  
**APPLICATION:** Saab 9-5 2.0L / 2.3L Turbo 2006.  
**Bosch 140 Amp. IR Alternators.**  
**ALTERNATOR #'S:** 0-124-525-143.  
**LESTER #'S:** 11454.  
**NOTES:** This is a Grease Filled IDP and Uses the Rubber / Metal "One Time Use" Cap.



**391021**

**6 GROOVE CLUTCH PULLEY W/ FREE WHEEL**


**REPLACES:** F00M-061-016, F00M-992-717; INA: F227079, 535002610; N0922; Volvo: 940432.8; IKA 3-3525-1.  
**DIMENSIONS:** 6 Groove, 34.5 mm L x 170 mm Bore x 56.0 / 61.0 mm OD x 21.0 mm Belt, CCV Rotation, 5.5 mm from Hub to Center of 1st Groove, M16 x 1.5 Thread.  
**APPLICATION:** Chrysler Voyager 2.5L TD 1998-2000.  
**Bosch 115 Amp. Alternator.**  
**ALTERNATOR #'S:** 0-123-510-109.  
**LESTER #'S:** 23014.



**391022**

**5 GROOVE CLUTCH PULLEY W/FREE WHEEL**

**REPLACES:** 1-126-601-566; INA: F225653, 535000410; Volkswagen: 028-903-119T, -165; IKA: 335221.  
**DIMENSIONS:** 5 Groove, 36.5 mm L x 170 mm Bore x 56.0 / 61.0 mm OD x 18.0 mm Belt, 16 mm from Hub to Center of 1st Groove, M16 x 1.5 Thread.  
**APPLICATION:** Audi A4 / VW Passat 1.9L Turbo Diesel.  
**Bosch 90-110 Amp. IR Alternators.**  
**ALTERNATOR #'S:** 0-123-320-055, 0-123-515-003; Bosch Reman: AL0713X.  
**LESTER #'S:** 21429, 21430.




**391023**

**5 GROOVE CLUTCH PULLEY W/ FREE WHEEL**

**REPLACES:** F00M-991-042; INA: F226322, 535000810; IKA: 3-3542-1; Volkswagen: 038-903-119P.  
**DIMENSIONS:** 5 Groove, 35.0 mm L x 170 mm Bore x 56.0 / 61.0 mm OD x 19.7 mm Belt, 7.5 mm from Hub to Center of 1st Groove, M16 x 1.5 Thread.  
**APPLICATION:** Audi A4 / VW Passat 1.8L 20V Turbo.  
**Bosch 120 Amp. IR Alternators.**  
**ALTERNATOR #'S:** 0-124-515-025; VW: 06B-903-016B.  
**LESTER #'S:** 11214.


**BOSCH**



**391024**

**6 GROOVE CLUTCH PULLEY W/FREE WHEEL**


**REPLACES:** F-00M-991-181, -255; INA: F235968, 535008610; IKA: 353141; Mercedes: 646-150-02-60, 648-155-00-15.  
**DIMENSIONS:** 6 Groove, 35.0 mm L x 17.0 mm Bore x 53.2 / 49.6 mm OD x 19.7 mm Belt, 8.5 mm from Hub to Center of 1st Groove, M16 x 1.5 Thread.  
**APPLICATION:** Mercedes E320 / S320 w / 3.2L Diesel.  
**Bosch 200 Amp. IR Alternators.**  
**ALTERNATOR #'S:** 0-124-625-014, -019, -033; AL0851X.  
**LESTER #'S:** 11216, 23269.



**391025**

**8 GROOVE CLUTCH PULLEY W/FREE WHEEL**


**REPLACES:** F00M-991-252; INA: F556234, 535009910; Chrysler: 51383490AA, 53034049AA; IKA: 353271.  
**DIMENSIONS:** 8 Groove, 361 mm L x 17.0 mm Bore x 57.7 / 62.7 mm OD x 29.3 mm Belt, 5.2 mm from Hub to Center of 1st Groove, M16 x 1.5 Thread.  
**APPLICATION:** Dodge Ram 5.9L Diesel, 6.7L Diesel, Porsche 911, Boxer, Cayman 3.6L, 3.8L 2006-On.  
**Bosch 132-150 Amp. ER / IR Alternators.**  
**ALTERNATOR #'S:** 0-124-525-105, -106, -107, -129, -154, -156; Bosch Reman.: AL6442X, AL6454X.  
**LESTER #'S:** 11235, 11239, 11337, 11338.



**391026**

**5 GROOVE CLUTCH PULLEY W/FREE WHEEL**


**REPLACES:** 1-126-601-045; F00M-147-724; F-00M-991-043, -045, -378; INA: F22565310, F552699.01, 535000510; Valeo: 593490, 2547439; IKA: 335411; VW: 022-903-119B, -119D; 028-903-119AC, 038-903-119J, -119M.  
**DIMENSIONS:** 5 Groove, 35.0 mm L x 17.0 mm Bore x 56.0 / 60.7 mm OD x 18.0 mm Belt, 13.5 mm from Hub to Center of 1st Groove, M16 x 1.5 Thread.  
**APPLICATION:** Audi A4 / VW Passat 1.9L Turbo Diesel. **Bosch 90-150 Amp. IR Alternators.**  
**ALTERNATOR #'S:** 0-124-325-018, -049; AL9404X; 0-124-515-026, -083; 0-124-525-010, -089; 0-124-615-021; Valeo: SG12B010, 012, 049, 074; SG14B011; SG9B017, 042.  
**LESTER #'S:** 11207, 11208, 11209, 11210, 11212, 23323.  
**NOTE:** This is the same Pulley as Valeo's 39320.



**391027**

**6 GROOVE ISOLATOR DECOUPLER PULLEY**


**REPLACES:** F-00M-991-241, -371; Tendeco: 920797; IKA: 3-5363-1.  
**DIMENSIONS:** 6 Groove, 38.0 mm L x 17.0 mm Bore x 58.24 mm OD x 20 mm Belt, 5 mm from Hub to Center of 1st Groove, Threads: 16 x 1.5.  
**APPLICATION:** Chevy Impala / Malibu / Monte Carlo (LZ9) 3.9L. **Bosch 120-125 Amp. Alternators.**  
**ALTERNATOR #'S:** 0-124-425-049, -089; AL8812X.  
**LESTER #'S:** 11236.



**391028**

**7 GROOVE CONVENTIONAL PULLEY**


**REPLACES:** F00M-991-132, F00M-991-299.  
**DIMENSIONS:** 7 Groove, 30.6 mm L x 17.0 mm Bore x 57.7 / 62.5 mm OD x 26.5 mm Belt.  
**APPLICATION:** Dodge Durango, Ram w / 5.7L Hemi. **Bosch 132-136 Amp. E/R Alternators.**  
**ALTERNATOR #'S:** 0-124-525-006, -051, -111, -155; AL6426X, AL6450X, AL6535X.  
**LESTER #'S:** 11233, 13985.

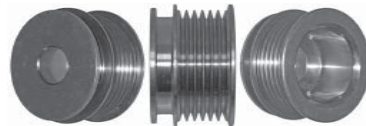

**391029**

**6 GROOVE CONVENTIONAL PULLEY**


**REPLACES:** F00M-991-094; BMW: 12-31-7-501-754.  
**DIMENSIONS:** 6 Groove, 37.3 mm L x 17.0 mm Bore x 50.0 / 55.0 mm OD x 23.5 mm Belt.  
**APPLICATION:** BMW 325i, 330i, 530i, X5 3.0L, Z3, Z4 3.0L. **Bosch 120-155 Amp. I/R Alternators.**  
**ALTERNATOR #'S:** 0-124-515-050, -052, -097, -105; 0-124-525-026, -080, -523; AL0703X, AL0814X, AL0816X.  
**LESTER #'S:** 11083, 13882, 13986.



**391030**

**6 GROOVE CONVENTIONAL PULLEY**


**REPLACES:** F-00M-991-004, -358; VW: 038-903-119B.  
**DIMENSIONS:** 6 Groove, 36.8 mm L x 17.0 mm Bore x 56.2 mm OD.  
**APPLICATION:** Audi A3-TT 3.2L, VW Beetle-Golf 2.0L, Chrysler Crossfire 3.2L, John Deere Loaders / Tractors, Mercedes E320-C32-CLK320-ML320, Porsche 911-Boxter.  
**Bosch 70-136 Amp. I/R Alternators.**  
**ALTERNATOR #'S:** 0-124-315-003, -004, -008, -030, -035, -036, -042, -055, -056; 0-124-325-003, -011, -016, -050, -051, -074, -075, -094, -097, -129, -135, -137, -138, -140; AL0188X, AL0700X, AL0716X, AL0788, AL5057X.  
**LESTER #'S:** 11124, 12445, 13810, 13850, 13852, 13884, 22912, 22996, 22998, 23232, 23235, 23356, 23855.



**391031**

**6 GROOVE CONVENTIONAL PULLEY**

**REPLACES:** F00M-991-014.  
**DIMENSIONS:** 6 Groove, 28.9 mm L x 17.0 mm Bore x 55.6 / 60.8 mm OD x 23.0 mm Belt.  
**APPLICATION:** Volvo S60, S80, V70, XC90 2.8L / 2.9L. **Bosch 120-160 Amp. I/R Alternators.**  
**ALTERNATOR #'S:** 0-124-515-017, -018; 0-124-525-001, -061; 0-124-625-001, -025; AL0756X, AL0799X.  
**LESTER #'S:** 11082, 11363, 11447, 13802, 13997.



**391032**

**6 GROOVE CONVENTIONAL PULLEY**


**REPLACES:** F00M-991-183.  
**DIMENSIONS:** 6 Groove, 27.3 mm L x 17.0 mm Bore x 62.0 / 68.0 mm OD x 22.6 mm Belt.  
**APPLICATION:** Buick Regal / Allure / Lacrosse, Chevrolet Impala / Monte Carlo, Pontiac Grand Prix with 3.8L Engine. **Bosch 105-125 Amp. I/R Alternators.**  
**ALTERNATOR #'S:** 0-124-415-035; 0-124-425-007, -008, -031, -090; AL8778X, AL8788X.  
**LESTER #'S:** 11045, 11126.



**391033**

**6 GROOVE CONVENTIONAL PULLEY**

**REPLACES:** 6-004-MG5-002.  
**DIMENSIONS:** 6 Groove, 27.3 mm L x 17.0 mm Bore x 57.0 / 64.0 mm OD x 23.0 mm Belt.  
**APPLICATION:** Buick Allure / Lacrosse 3.6L, Chevrolet Impala / Monte Carlo 3.5L, 3.9L, GM Cars 31L, 34L, GM Vans 34L, Chevrolet / GMC Trucks with 4.3L, 4.8L, 5.3L, 6.0L Engines. **Bosch 105-150 Amp. I/R Alternators.**  
**ALTERNATOR #'S:** 0-124-415-033; 0-124-425-030, -032; 0-124-525-072, -104; 6-004-MA5-008; 6-004-ML0-012, -017, -021, -024; AL8501X, AL8512X, AL8776X, AL8782X, AL8786X.  
**LESTER #'S:** 11075, 11125, 11185, 13770, 771, 880, 989.




**391034**

**6 GROOVE CONVENTIONAL PULLEY**

**REPLACES:** F00M-991-085; Mercedes: 112-155-02-15.  
**DIMENSIONS:** 6-G, 294 mm L x 50.2 mm OD x 17 mm.  
**APPLICATION:** Chrysler Crossfire 3.2L, Mercedes C Series 2.6L3.2L, CL Series 5.0L, CLK Series 3.2L-4.3L, CLS Series 5.0L, E Series 3.2L-4.3L-5.0L-5.5L, G Series 5.0L-5.5L, ML Series 3.2L-3.7L-5.0L, S Series 4.3L-5.0L-5.5L, SLK Series 5.5L, Mini Cooper 1.6L. **Bosch 120-180 Amp. I/R Alternators.**  
**ALTERNATOR #'S:** 0-124-515-055, -056, -130, -131, -132; 0-124-615-012, -014, -020, -044, -046, -047, -049; 0-124-625-005, -007, -032; AL0787X, AL0788X, AL789X, AL819X.  
**LESTER #'S:** 11042, 11068, 11124, 13884, 13953.

## BOSCH

**391035****7 GROOVE CONVENTIONAL PULLEY**

REPLACES: 6-004-MT0-000.


DIMENSIONS: 7 Groove, 30.6 mm L x 170 mm Bore x 57.7 / 62.5 mm OD x 26.5 mm Belt.

APPLICATION: Dodge Ram 3.9L, 5.2L, 5.9L, 8.0L

Bosch 117-136 Amp. E/R Alternators.

ALTERNATOR #S: 0-124-425-001; 0-124-525-004, -007; 6-004-MLO-002; AL6402X, AL6425X, AL6429X.

LESTER #S: 13854, 13917, 13920.

**391036****6 GROOVE CONVENTIONAL PULLEY**

REPLACES: 6-004-MT0-001.


DIMENSIONS: 6 Groove, 27.3 mm L x 170 mm Bore x 57.7 / 62.3 mm OD x 23.7 mm Belt.

APPLICATION: Dodge Dakota / Durango 4.7L, Jeep Grand Cherokee 4.0L, 4.7L

Bosch 132 Amp. E/R Alternators.

ALTERNATOR #S: 0-124-525-003; 6-004-MLO-001; AL6403X, AL6428X.

LESTER #S: 13777, 13872.

**391037****6 GROOVE CONVENTIONAL PULLEY**

REPLACES: F00M-991-215.

DIMENSIONS: 6 Groove, 28.5 mm L x 170 mm Bore x 56.5 / 63.5 mm OD x 21.5 mm Belt.

APPLICATION: Chevrolet / GMC C, K, R, U Series Pickup Trucks 4.3L, 4.8L, 5.3L, 6.0L, 6.6L, 81L, Chevrolet Avalanch, Express Van, Suburban, GMC Yukon, Safari, Savana.

Bosch 100-110 Amp. I/R Alternators.

ALTERNATOR #S: 0-124-325-121, -133, -152, -153, -154, -164; AL8787X.

LESTER #S: 11073, 11076.

**391038****LITENS ISOLATOR DECOUPLER PULLEY**

REPLACES: Tendeco: 920803; Ford: 6G9N-10D311-AA; Land Rover: LR001470; Volvo: 30750109, 30750409; INA: 535017510, 535020610.


DIMENSIONS: 38.0 mm L x 170 mm Bore, 16 x 1.5 LH \*Left-Hand Tread, 17 x 20 Spline.

APPLICATION: Land Rover Freelander 3.2L, Volvo V70, S80, XC70, XC90 Short I6 3.2L, 3.0L Turbo.

Bosch 150-180 Amp. Alternators.

ALTERNATOR #S: 0-121-615-011, 0-121-715-009.

LESTER #S: 11345, 11346.

**391039**

REPLACES: 1-126-600-954, -990; 1-126-601-525, -537, -546; GM: 90486360, 90512901; Saab: 4466900, 5100813; VVV: 065-903-119.


DIMENSIONS: 6 Groove, 27.6 mm L x 170 mm Bore x 56.0 / 61.0 mm OD x 22.8 mm Belt.

APPLICATION: Cadillac Catera, Saab 900 / 9000 / 9-5. Bosch 70-130 Amp. I/R Alternators.

ALTERNATOR #S: 0-123-212-001; 0-123-310-015, -023, -029, -053; 0-123-320-014; 0-123-500-007;

0-123-505-003, -004; 0-123-510-003, -020, -027, -0052, -062, -064, -093; AL0780X, 0783X, 8500X.

LESTER #S: 13609, 13736, 13808, 20969, 21177, 21224.

**391040****5 GROOVE CONVENTIONAL PULLEY**

REPLACES: F00M-991-047; GM: 9196405.

DIMENSIONS: 5 Groove, 37.0 mm L x 170 mm Bore x 57.1 / 62.0 mm OD x 170 mm Belt, 17 mm from Hub to Center of 1st Groove.

APPLICATION: Saturn I-Series 2.2L 2000-2004.

Bosch 100-120 Amp. I/R Alternators.

ALTERNATOR #S: 0-124-415-009, -025; 0-124-515-016, -033, -095; B-120-516-147; AL8503X.

LESTER #S: 13804, 23106, 23241.

**391041****6 GROOVE CLUTCH PULLEY W/ FREE WHEEL**

REPLACES: F00M-991-220; INA: F550371 / 01; 535010610; IKA: 353411.


DIMENSIONS: 6-Groove, 34.7 mm L x 17 mm Bore x 55.9 / 61 mm OD x 22 mm Belt, 4.8 mm from Hub to Center of 1st Groove, M16 x 1.5 Thread.

APPLICATION: Buick Allure, LaCrosse 3.6L 2005-2008.

Bosch 120-125 Amp. IR Alternators.

ALTERNATOR #S: 0-124-425-030, 0-124-425-063; AL8786X, AL8809X.

LESTER #S: 11125, 11232.

**391043****5 GROOVE CLUTCH PULLEY W/ FREE WHEEL**

REPLACES: 1-126-601-567, 1-127-011-848, F00M-992-711; INA: F226322; 535000710; IKA: 33521-t; VVV: 058-903-119C, 058-903-165.


DIMENSIONS: 5 Groove, 36.5 mm L x 170 mm Bore x 56.0 / 61.0 mm OD x 18 mm Belt, 7.5 mm from Hub to Center of 1st Groove, M16 x 1.5 Thread.

APPLICATION: Audi A6 Quattro 1.8L 1997-2000.

Bosch 120 Amp. Alternator.

ALTERNATOR #S: 0-123-510-045; VVV: 058-903-016D.

LESTER #S: 23237.

**391044****6 GROOVE CLUTCH PULLEY W/ FREE WHEEL**

REPLACES: 1-126-601-549, -572; F00M-991-392; INA: F225643, 535 0077 10; IKA: 335871; Delphi: 211242, 220681; Mercedes: 604-150-01-60, 604-150-05-60; Valeo: 2655139.

DIMENSIONS: 6 Groove, 35.7 mm L x 170 mm Bore x 61.0 mm OD x Belt 22 mm, 6 mm from Hub to Center of 1st Groove, M16 x 1.5 Thread.

APPLICATIONS: Mercedes V230TD, Vito 2.3L Diesel. Bosch 115-150 Amp. Alternators.

ALTERNATOR #S: 0-123-320-047, -062; 0-123-510-058, -075, -102; 0-123-520-010.

LESTER #S: 12676, 12677, 22902.

**391045****6 GROOVE CLUTCH PULLEY W / FREE WHEEL**


REPLACES: 1-126-601-597, F00M-061-023; F228824; INA: 535001510; IKA: 335291; Mercedes: 611-150-01-60, 611-155-02-15, 611-155-06-15.

DIMENSIONS: 6-Groove, 39.2 mm L x 17 mm Bore x 49.7/55.5 mm OD x 21 mm Belt, 14.5 mm from Hub to Center of 1st Groove, M16 x 1.5 Thread.

APPLICATION: Mercedes Sprinter Van, G-Class, V-Class 2.0L / 2.2L. Bosch 90-150 Amp. IR Alternators.

ALTERNATOR #S: 0-123-320-051, -065; 0-123-510-107, -108; 0-123-520-023; AL0791X.

LESTER #S: 12383, 22879, 23020.

**391046****5 GROOVE CLUTCH PULLEY W/ FREE WHEEL**

REPLACES: F00M-147-859; F-00M-991-234, -286; INA: F551357, 535011310; IKA: 353431.

DIMENSIONS: 5 Groove, 37.3 mm L x 170 mm Bore x 55.9 / 61.0 mm OD x 19 mm Belt, 18 mm from Hub to Center of 1st Groove, M16 x 1.5 Thread.


APPLICATIONS: VW Beetle (Mexico) 2.5L 2006-2009.

Bosch 140 Amp. Alternators.

ALTERNATOR #S: 0-124-525-095, 0-124-525-103.

LESTER #S: 11460.

NOTE: Similar to 391057, but has Left Hand Thread.

**391047****TOOTHED CLUTCH PULLEY W/ FREE WHEEL**

REPLACES: F00M-991-300, F00M-391-119; INA: F237653; 535011810; IKA: 354071, 354087; VVV: 070-903-201C.

DIMENSIONS: 18 Splines, 33.6 mm L x 17 mm Bore x 62 / 76 mm OD, M16 x 1.5 Thread.

APPLICATION: VW Phaeton, Touareg 5.0L Diesel, 2.5TDI.

Bosch 150-190 Amp. Watercooled Alternators.


ALTERNATOR #S: 0-121-615-013, -025, -026, -029;

0-121-715-004, -033; 0-124-615-023, -031;


0-124-625-013, -018.

LESTER #S: 11472, 23321, 23322.


**BOSCH**




**391048**  
**6 GROOVE CLUTCH PULLEY W/ FREE WHEEL**  
**REPLACES:** F-00M-991-141, -301; F00M-147-746;  
 F-00M-391-122, 391; INA: F236528; 535008210,  
 535018310; IKA: 33591; BMW: 12-31-4-466-273,  
 12-31-7-516-103, -521-965, -552-353.  
**DIMENSIONS:** 6 Groove, 33.5 mm L x 17.0 mm Bore x  
 53.4 / 50.0 mm OD x 20 mm Belt, M16-1.5 Thread.  
**APPLICATION:** BMW 128, 328, 528 3.0L, 323 2.5L, 550,  
 650, 750 Series 4.8L, X5, Z4 3.0L.  
**Bosch 120-180 Amp. Alternators.**  
**ALTERNATOR #'S:** 0-121-615-010; **0-121-715-012**, -112;  
 0-124-515-098; **0-124-525-042**, -045, -048, -049,  
 -059, -083; AL0839X, AL0841X, AL0842X.  
**LESTER #'S:** 11077, 11300, 11301, 23253, 23254, 23775.



**391049**  
**7 GROOVE CLUTCH PULLEY W/ FREE WHEEL**  
**REPLACES:** F00M-991-260; F-00M-349-824, -899;  
 F00M-391-158, 0-121-C00-401; F55400702, -03;  
 535016410; IKA: 353861; BMW: 12-31-7-560-678.  
**DIMENSIONS:** 7-Groove, 361 mm L x 17 mm Bore x  
 55.4 / 49.0 mm OD x 24 mm Belt, M16-1.5 Thread.  
**APPLICATION:** BMW 135 / 335 / 535 Series 3.0L, X5  
 3.0L **Bosch 180-183 Amp. Alternators.**  
**ALTERNATOR #'S:** 0-120-000-027, -031; **0-121-715-016**,  
 -017, -018; AL0847X, AL0850X.  
**LESTER #'S:** 11302, 11362.




**391050**  
**5 GROOVE CLUTCH PULLEY W/ FREE WHEEL**  
**REPLACES:** 1-126-601-556, -557; 1-127-011-843;  
 F00M-991-397; INA: F226556, F226556.04,  
 535000910; IKA: 335151; VW: 028-903-119AP.S.  
**DIMENSIONS:** 5-Groove, 372 mm L x 17 mm Bore x  
 56.2 / 61.5 mm OD x 19.0 mm Belt, 18 mm from  
 Hub to Center of 1st Groove, M16 x 1.5 Thread.  
**APPLICATION:** VW 1.7L, 1.9L Diesel Applications.  
**Bosch 70-120 Amp. IR Alternators.**  
**ALTERNATOR #'S:** 0-123-310-038; **0-123-320-033**, -036,  
 -048; **0-123-325-006**, -036, -048.  
**LESTER #'S:** 21483, 21484, 22708, 22785.




**391051**  
**8 GROOVE CLUTCH PULLEY W/ FREE WHEEL**  
**REPLACES:** F233379.01, 535013110; IKA: 3-5360-1;  
 John Deere: AL158161, AL161112, AL166836.  
**DIMENSIONS:** 8-Groove, 39.5 mm L x 17 mm Bore x  
 55.5 / 61.0 mm OD x 28 mm Belt, 4.8 mm from  
 Hub to Center of 1st Groove, M16-1.5 Thread.  
**APPLICATION:** John Deere 6020, 6029 Tractors.  
**Bosch 90-150 Amp. IR Alternators.**  
**ALTERNATOR #'S:** 0-124-325-166, 0-124-515-126.  
**LESTER #'S:** 12780, 12781.  
**NOTES:** Shaft width into the OAP - 76 mm.



**391052**  
**6 GROOVE ISOLATOR DECOUPLER PULLEY**  
**REPLACES:** Tendeco: 920851; Bosch: F00M-147-910,  
 F00M-991-277; INA: 535021010; IKA: 354061;  
 Volkswagen: 06H-903-119B, 06H-903-201C.  
**DIMENSIONS:** 6-Groove, 17 mm Bore x 40 mm L x  
 56.5 / 61 mm OD x 21.5 mm Belt, 12.9 mm from  
 Hub to Center of 1st Groove, 17 x 20 Spline,  
 M16-1.5 Thread.  
**APPLICATION:** Audi A4 1.8L / 2.0L, A5, Q5 2.0L  
 2007-2014. **Bosch 140-150 Amp. IR Alternators.**  
**ALTERNATOR #'S:** 0-124-525-113, 0-124-525-210;  
**0-125-711-051**, -090, -127, -128, -151, -152.  
**LESTER #'S:** 11466, 11724, 11725, 11727.




**391053**  
**6 GROOVE CONVENTIONAL PULLEY**  
**REPLACES:** 1-126-600-567, -568, -735, -984;  
**1-126-601-039**, -040, -544, -548; Mercedes:  
 000-155-01-15, 104-155-01-15, 111-155-04-15.  
**DIMENSIONS:** 6 Groove, 17 mm Bore x 50 mm OD x  
 21 mm Belt.  
**APPLICATION:** Mercedes GClass, EClass, S-Class,  
 SL-Class. **Bosch 70-120 Amp. I/R Alternators.**  
**ALTERNATOR #'S:** 0-120-465-013, -014, -015;  
**0-120-468-057**, -058; **0-120-469-744**, -745, -746,  
 -894, -896, -925, -926, -927, -946, -947, -948;  
**0-120-485-011**, -012; **0-120-488-126**, -325, -326,  
 -327; **0-120-489-328**, -329, -330; 0-123-310-005;  
 0-123-315-005, 0-123-320-044, 0-123-335-002,  
 0-123-335-006, 0-123-500-001; **0-123-510-002**,  
 -012, -039, -066, -067; **0-123-540-002**, -003, -004;  
 0-123-545-004; AL0160X, AL0161X, AL0163X,  
 AL0168X, AL0169X, AL0762X, AL0763X, AL0767X,  
 AL165X, AL166X, AL65X, AL66X.  
**LESTER #'S:** 13243, 13356, 13359, 13363, 13367, 13376,  
 13613, 13613, 13793, 13797, 13803, 14820.



**391054**  
**6 GROOVE CONVENTIONAL PULLEY**  
**REPLACES:** 1-126-600-770, 1-126-601-516, 1-127-011-758;  
 Volvo: 6849853.  
**DIMENSIONS:** 6 Groove, 56 mm OD x 28.9 mm W x  
 17 mm Bore.  
**APPLICATION:** Volvo 850Series 2.3L24L, 960 Series,  
 S90 / V90 2.9L, C70 / S70 / V70 2.3L24L.  
**Bosch 100-120 Amp. I/R Alternators.**  
**ALTERNATOR #'S:** 0-120-465-006, -012, -029;  
**0-123-213-005**, -006; **0-123-500-004**, -006;  
**0-123-505-014**, -016; **0-123-510-017**, -106;  
**0-123-545-001**, -003; AL0053X, AL0159X,  
 AL0751X, AL0754X.  
**LESTER #'S:** 13417, 13520, 13541, 13800.



**391055**  
**6 GROOVE SERPENTINE PULLEY**  
**REPLACES:** F00M-991-100.  
**DIMENSIONS:** 6 Groove, 64 / 57 mm OD x 27.5 mm W x  
 17 mm Bore, 20 mm Belt.  
**APPLICATION:** Chevrolet / GMC C / K / R / V Series  
 Pickups, Express / Savana Vans, Tahoe /  
 Yukon, Suburban / Yukon XL 2007-2009.  
**Bosch 125 Amp. I/R Alternators.**  
**ALTERNATOR #'S:** 0-124-425-035; AL8813X.  
**LESTER #'S:** 11234.



**391056**  
**5 GROOVE CLUTCH PULLEY W/ FREE WHEEL**  
**REPLACES:** F00M-349-823, F00M-391-124;  
 INA: F557564, 535016110; IKA: 3-5385-1;  
 Ford: 1541451, 6M5T-10300-SA; Volvo: 30667980,  
 30773111, 36000207.  
**DIMENSIONS:** 5-Groove, 35.2 mm L x 17 mm Bore x  
 55.5 / 61.0 mm OD x 18.0 mm Belt, 10.5 mm from  
 Hub to Center of 1st Groove, M16 - 1.5 Thread.  
**APPLICATION:** Volvo C30, S40, V50 24L / 2.5L, C70  
 2.5L **Bosch 150-175 Amp. IR Alternators.**  
**ALTERNATOR #'S:** 0-121-615-014, -114; **0-125-711-014**,  
 -023, -040, -048, -053; AL0859X.  
**LESTER #'S:** 11347, 11568.




**391057**  
**5 GROOVE CLUTCH PULLEY W/ FREE WHEEL**  
**REPLACES:** F00M-147-808; F-00M-991-218, -285;  
 INA: F240138, 535009600; IKA: 3-5324-1;  
 Volkswagen: 07K-903-119A.  
**DIMENSIONS:** 5 Groove, 37 mm L x 17.0 mm Bore x  
 55.9 / 61.0 mm OD x 19 mm Belt, 18 mm from  
 Hub to Center of 1st Groove, M16 x 1.5 Thread.  
**APPLICATIONS:** Audi TT RS 2.5L 2010, VW Golf, Jetta,  
 Rabbit 2.5L **Bosch 140 Amp. Alternators.**  
**ALTERNATOR #'S:** 0-124-525-102, -215, -547;  
 F000-BL0-8G3, F000-BL0-8G4; AL0889X.  
**LESTER #'S:** 11254, 11566.  
**NOTE:** Similar to 391046, but has Right Hand Thread.



**391058**  
**6 GROOVE ISOLATOR DECOUPLER PULLEY**  
**REPLACES:** F00M-991-238; Tendeco: 920801;  
 IKA: 3-5361-1; GM: 12760888.  
**DIMENSIONS:** 6 Groove, 45 mm L x 17.0 mm Bore x  
 58 mm OD x 22.7 mm Belt, 20.3 mm from Hub to  
 Center of 1st Groove, M16 x 1.5 Thread.  
**APPLICATION:** Saab 9-3 with 2.8L V6 Turbo 2006-2009.  
**Bosch 155 Amp. IF/IR Alternator.**  
**ALTERNATOR #'S:** 0-124-525-097; AL0858X.  
**LESTER #'S:** 11187.

**BOSCH**

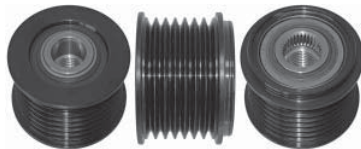

**391059**

**7 GROOVE CLUTCH PULLEY W/ FREE WHEEL**


**REPLACES:** F00M-349-826; **F-00M-391-110, -146;** F00M-991-157; INA: F236127, 535008410; IKA: 3-5312-1; Mercedes: 628-150-00-60, -62; 642-150-00-62, 642-150-08-60.  
**DIMENSIONS:** 7 Groove, 391 mm L x 170 mm Bore x 49.7 / 55.0 mm OD x 25 mm Belt, 10.8 mm from Hub to Center of 1st Groove, M16 x 1.5 Thread.  
**APPLICATION:** Mercedes CLS Class 3.2l 2005-2009, 3.5L 2009-On, E Class 3.0L 2008-2009, 3.0L Diesel 2007-2009, GL Class 3.5L 2009, ML Class 3.0L Diesel 2009-On, R Class 3.5L 2009-On.  
**Bosch 180-220 Amp. Alternators.**  
**ALTERNATOR #'S:** 0-121-715-011, -015, -115; AL0843X; 0-121-813-020, -120; 0-124-625-004, -017.  
**LESTER #'S:** 11307, 11445, 23964.



**391060**

**6 GROOVE CLUTCH PULLEY W/ FREE WHEEL**


**REPLACES:** F00M-147-876; **F-00M-991-247, -287;** F00M-A47-723; INA: F551406, 535012410; IKA: 3-5344-1; Valeo: 2604787; VW: 03G-903-119B, 045-903-119, 045-903-119A.  
**DIMENSIONS:** 6 Groove, 40.2 mm L x 170 mm Bore x 49.5 / 55.0 mm OD x 22 mm Belt, 14.5 mm from Hub to Center of 1st Groove, M16 x 1.5 Thread.  
**APPLICATION:** Audi A5 2.0L TDI 2008, TT 3.2L 2006-2008, VW CC 3.6L 2009-2011, Polo 14L, Eos 2.0L TDI 2006-2008, Passat 3.6L 2008-2011.  
**Bosch / Valeo Alternators.**  
**ALTERNATOR #'S:** 0-121-715-042, -049, -077, -142, -177; 0-124-315-037; 0-124-325-141, -142, -190; 0-124-525-114, -146; 0-125-711-034, -081, -088, -107, -108, -129, -130, -153, -154; 0-125-811-008, -035; Valeo: TG14C020, 023; TG15C165, TG17C066.  
**LESTER #'S:** 11425, 11463, 11714, 20017, 23827.  
**NOTES:** Same as 39350 for Valeo.



**391061**

**8 GROOVE CLUTCH PULLEY W / FREE WHEEL**

**REPLACES:** F233379.06.  
**DIMENSIONS:** 8-Groove, 39.5 mm L x 17 mm Bore x 55.5 / 61.0 mm OD x 28 mm Belt, 4.8 mm from Hub to Center of 1st Groove, M16 - 1.5 Thread.  
**APPLICATION:** John Deere 6020, 6029 Tractors.  
**Bosch 90-150 Amp. IR Alternators.**  
**ALTERNATOR #'S:** 0-124-325-166, 0-124-515-126.  
**LESTER #'S:** 12780, 12781.  
**NOTES:** Same as 391051, except 391061 Shaft width into the OAP - 16.0 mm.



**391062**

**6 GROOVE CLUTCH PULLEY W/ FREE WHEEL**


**REPLACES:** F00M-349-870; F00M-391-140; INA: F560565, 535016610; IKA: 3-5387-1; BMW: 12-31-7-575-518.  
**DIMENSIONS:** 6 Groove, 38.5 mm L x 170 mm Bore x 49.3 / 53.5 mm OD x 22.6 mm Belt, 13.6 mm from Hub to Center of 1st Groove, M16 x 1.5 Thread, Fitting Lenth 9.0 mm.  
**APPLICATION:** Mini Cooper 1.6L 2007-2012, Cooper Countryman 1.6L 2011-2013, Paceman 1.6L 2013, Peugeot. **Bosch 150-151 Amp. Alternators.**  
**ALTERNATOR #'S:** 0-121-615-012, -027, -127, -144; 0-125-711-011, 0-125-711-078.  
**LESTER #'S:** 11335, 11336, 23561.



**391063**

**6 GROOVE CLUTCH PULLEY W/ FREE WHEEL**


**REPLACES:** F00M-349-877; **F-00M-391-107, -118, -120;** INA: F554766, 535016010; IKA: 3-5384-1; Fiat: 77364082.  
**DIMENSIONS:** 6 Groove, 36.3 mm L x 170 mm Bore x 58.7 / 64.0 mm OD x 22.6 mm Belt, 8.0 mm from Hub to Center of 1st Groove, M16 x 1.5 Thread, Fitting Lenth 11.0 mm.  
**APPLICATION:** Citroen, Fiat, Ford Transit, Peugeot. **Bosch 156 Amp. Alternators.**  
**ALTERNATOR #'S:** 0-120-000-024, 0-121-615-002.  
**LESTER #'S:** 23925.



**391064**

**8 GROOVE CLUTCH PULLEY W / FREE WHEEL**

**REPLACES:** F00M-349-828, F00M-391-104, F00M-391-144; INA: F239356, 535010810; IKA: 3-5335-1; Mercedes: 629-150-00-60.  
**DIMENSIONS:** 8-Groove, 434 mm L x 17 mm Bore x 50.0 / 55.0 mm OD x 29.8 mm Belt, 11.3 mm from Hub to Center of 1st Groove, M16-1.5 Thread.  
**APPLICATION:** Mercedes GL320, ML320, R320 3.0L Diesel. **Bosch 220 Amp. IR Alternators.**  
**ALTERNATOR #'S:** 0-121-813-003, -103, -104; AL0872X.  
**LESTER #'S:** 11308.



**391065**

**6 GROOVE CONVENTIONAL PULLEY**


**REPLACES:** F00M-991-041, F00M-991-360; VW: 038-903-119K.  
**DIMENSIONS:** 6-Groove, 26.5 mm L x 64.7 mm OD x 17 mm x 20.0 mm Depth.  
**APPLICATION:** Audi A4 / A6 3.0L, Allroad Quattro 2.7L, A4 / VW Passat 2.8L. **Bosch 90-150 Amp. I/R Alternators.**  
**ALTERNATOR #'S:** 0-124-325-019, 0-124-515-028, 0-124-515-040, 0-124-525-008, 0-124-615-007.  
**LESTER #'S:** 11065, 11133, 13921, 13922.



**391066**

**8 GROOVE CONVENTIONAL PULLEY**

**REPLACES:** 6-004-MT0-002, F00M-991-165.  
**DIMENSIONS:** 8-Groove, 33.5 mm L x 170 mm Bore x 62.0 / 57.0 mm OD x 32.0 mm Belt, 3.9 mm from Hub to Center of 1st Groove, 28.0 mm Depth.  
**APPLICATION:** Dodge Ram 5.9L / 5.9L Diesel 1999-2005. **Bosch 132-136 Amp. I/R Alternators.**  
**ALTERNATOR #'S:** 0-124-525-005, 0-124-525-041, 6-004-MT0-004; AL6400X, AL6430X.  
**LESTER #'S:** 11314, 13881, 13987.



**391067**

**6 GROOVE CLUTCH PULLEY W/ FREE WHEEL**

**REPLACES:** F00M-349-835, F00M-991-278, F00M-992-709; F00M-A47-700; INA: F558658, 535020110; IKA: 3-5431-1; VW: 06E903-119L, 06E903-119R.  
**DIMENSIONS:** 6-Groove, 38.5 mm L x 170 mm Bore x 64.6 mm OD x 22.6 mm Belt, 12.9 mm from Hub to Center of 1st Groove, M16 x 1.5 Thread, 111 mm Fitting Depth.  
**APPLICATION:** Audi A6 3.0L 2009 / 3.2L 2006-2010. **Bosch 180 Amp. I/R Alternators.**  
**ALTERNATOR #'S:** 0-121-715-022, -050, -075, -078, -122, -150, -178; 0-124-325-078, 0-124-525-508.  
**LESTER #'S:** 11222, 11478, 11495.




**391068**

**LITENS ISOLATOR DECOUPLER PULLEY**

**REPLACES:** Tendeco: 920821; Ford: 6G9N-6A312-AE; INA: 535019510; Land Rover: LR001974, LR004305; Volvo: 30750929, 30777744, 30711314, 5414465898358.  
**DIMENSIONS:** 6-Groove, 52.6 mm L x 176 mm Bore x 65.0 / 69.0 mm OD x 23.0 mm Belt, 4.6 mm Fitting Length.  
**APPLICATION:** Land Rover Freelander / LR2 3.2L, Volvo S60, S80 3.0L, V70, S80, XC60, XC70, XC90 Short I6 3.2L, 3.0L Turbo.  
**Bosch 180 Amp. Alternators.**  
**ALTERNATOR #'S:** 0-121-715-009, 0-121-715-109.  
**LESTER #'S:** 11346.


**DELCO**




**39620**

**REPLACES:** 10475021.  
**DIMENSIONS:** 6-Groove, 31.7 mm L x 170 mm Bore x 514 mm OD.  
**APPLICATION:** Isuzu Amigo, Rodeo 2.2L 1998-2001. **Delco 100 Amp. CS130D Series Alternators.**  
**ALTERNATOR #'S:** 10479923, 10480384, 3393923; Bosch Reman: AL4443X.  
**LESTER #'S:** 8239.

**DELCO**



**39601**  
**6 GROOVE CLUTCH PULLEY W/FREE WHEEL**  
**REPLACES:** Delco: 10484670; INA: F230753.06, F554765.02, 535003310; IKA: 3-3537-1.  
**DIMENSIONS:** 6-Groove, 35.6 mm L x 17.0 mm Bore x 57.0 / 61.5 mm OD x 21.0 mm Belt x 6.8 mm from Hub to Center of 1st Groove, M17 x 1.25 Thread.  
**APPLICATION:** Oldsmobile Intrigue 3.5L 1999-2002, Pontiac Grand Prix 3.8L 2004, Chevrolet / GMC Trucks 8.1L **Delco 105-125 Amp. AD230 / AD237 Series Alternators.**  
**ALTERNATOR #S:** 10311493, 10343535, 10464395, 10464469, 10464478, 10464493, 10480341, 15087020, 323-1739, 323-1829; Bosch: AL8736X.  
**LESTER #S:** 8241, 8293, 8299, 8489, 8491-3, 8499.




**39602**  
**6 GROOVE CLUTCH PULLEY W/FREE WHEEL**  
**REPLACES:** GM: 55567951; INA: F563434, 535020210; IKA: 3-5457-1; Delphi: 222588; Opel: 1204178.  
**DIMENSIONS:** 6-Groove, 40.0 mm L x 17.0 mm Bore x 53.8 mm OD x 22.5 mm Belt x 13.7 mm from Hub to Center of 1st Groove, M16 x 1.5 Thread.  
**APPLICATION:** Chevrolet Aveo, Cruze, Sonic 14L **Delco 100 Amp. Alternator.**  
**ALTERNATOR #S:** 13500582.  
**LESTER #S:** 21512.


**FORD**



**39651**  
**7 GROOVE ISOLATOR DECOUPLER PULLEY**  
**REPLACES:** YCIU-1033-EA; VP2CIU-10A352-AA, -BB; YCIU-10A352-BA, -BB; Tendeco: 920583; INA: 535012010; IKA: 3-5359-1.  
**DIMENSIONS:** 7 Groove, 79 mm L x 17 mm Bore x 59.2 / 61.5 mm OD x 25 mm Belt, M16 x 1.5 Thread, 17 x 20 Spline, 49 mm from Hub to Center of 1st Groove.  
**APPLICATIONS:** Ford Transit Van 24L 2001-2003.  
**Ford 6G Series 105-125 Amp. IR Alternators.**  
**ALTERNATOR #S:** 2C1T-10300-BB, YCIU-10300-DB, YCIU-10300-DC, YCIU-10300-EA.  
**LESTER #S:** 8530, 8534.  
**NOTE:** Replace 7-Groove Clutch Pulley F558404.




**39652**  
**6 GROOVE OVERRUNNING CLUTCH PULLEY**  
**REPLACES:** VP3W3U-10A352-AA; INA: F233591, 535016210.  
**DIMENSIONS:** 6 Groove, 35.8 mm L x 17 mm Bore x 60 / 63.8 mm OD x 22 mm Belt, 5 mm from Hub to Center of 1st Groove, M16 x 1.5 Thread.  
**APPLICATIONS:** Ford Crown Victoria, Mustang, Mercury Grand Marquis, Marauder 4.6L 2003-2004.  
**Ford 4G Series 130 Amp. IR Alternators.**  
**ALTERNATOR #S:** 3W3U-10300-AA, 3Z3U-10346-AA, 3W3Z10346-AA; Motorcraft: GL-547.  
**LESTER #S:** 8314, 8436.



**39653**  
**6 GROOVE OVERRUNNING CLUTCH PULLEY**  
**REPLACES:** VP2M5U-10A352-AA, VP6S4U-10A352-AA; IKA: 3-5354-1; INA: F235931, 535010010.  
**DIMENSIONS:** 6 Groove, 36.5 mm L x 17 mm Bore x 54 / 62 mm OD x 23.2 mm Belt, 9.2 mm from Hub to Center of 1st Groove, M16 x 1.5 Thread.  
**APPLICATIONS:** Ford Focus 2.0L, 2.3L 2005-2006.  
**Ford 6G Series 110 Amp. IR Alternators.**  
**ALTERNATOR #S:** 4S4T-10300-BB, -BD; GL-592; 4S4Z10346-BA, -BB; 5S4T-10300-BB, -BD; 5S4Z10346-BA; GL-650; Bosch: AL7626X.  
**LESTER #S:** 8407, 8418.



**39654**  
**6 GROOVE OVERRUNNING CLUTCH PULLEY**  
**REPLACES:** VP5L8U-10A352-AA; INA: F237401.01, 535013210.  
**DIMENSIONS:** 6 Groove, 36.5 mm L x 17 mm Bore x 53.2 / 59 mm OD x 22.8 mm Belt, 5.3 mm from Hub to Center of 1st Groove, M16 x 1.5 Thread.  
**APPLICATIONS:** Ford Focus 2.0L, 2.3L M/T 2005-2006.  
**Ford 4G Series 130 Amp. IR Alternators.**  
**ALTERNATOR #S:** 5S4T-10300-DA, -DB, -DC; 5S4Z10346-DA, -DB; GL-612, GL-907; AL7621X.  
**LESTER #S:** 8402, 8404, 8512.



**39656**  
**6 GROOVE OVERRUNNING CLUTCH PULLEY**  
**REPLACES:** 1S7U-10A352-DB, -EA; INA: F232854.03, F556615, 535007410, 535022310; IKA: 3-3590-1.  
**DIMENSIONS:** 6 Groove, 36.5 mm L x 17 mm Bore x 53.5 / 59.5 mm OD x 20 mm Belt, 11 mm from Hub to Center of 1st Groove, M16 x 1.5 Thread.  
**APPLICATIONS:** Ford Mondeo 1.8L / 2.0L 2000-2007.  
**Ford RC28 Type 125 Amp. IR Alternators.**  
**ALTERNATOR #S:** 1S7T-10300-CA, 1S7T-10300-CB, 1S7T-10300-CC, 1S7T-10300-CD.  
**LESTER #S:** 22150.



**39675**  
**4 GROOVE ISOLATOR DECOUPLER PULLEY**  
**REPLACES:** Denso: 021040-2300; Tendeco: 920027; Ford: D8AE10A352-BA, DA8Z10344-B.  
**DIMENSIONS:** 4 Groove, 47.5 mm L x 17.0 mm Bore x 59.0 mm OD x 14.5 mm Belt, 8.9 mm from Hub to Center of 1st Groove, M14 x 1.5 Thread.  
**APPLICATIONS:** Ford Flex-Taurus 3.5L-Fusion 2.0L / 2.5L, Lincoln MKS 3.5L-MKZ 2.0L, MKT 3.5L / 3.7L **Denso / Ford 175-200 Amp. IR Alternators.**  
**ALTERNATOR #S:** DG1T-10300-GA, DG1Z10346-E.




**39676**  
**6 GROOVE ISOLATOR DECOUPLER PULLEY**  
**REPLACES:** Denso: 021040-2290; Ford: CJ5Z10344-A, CJ5G-10A352-BA; Tendeco: 920028.  
**DIMENSIONS:** 6-Groove, 41.0 mm L x 17.0 mm Bore x 52.0 mm OD x 21.0 mm Belt, 12.8 mm from Hub to Center of 1st Groove, M14 x 1.5 Thread.  
**APPLICATIONS:** Ford Escape, Fusion 1.6L 2013-2014.  
**Denso / Ford 150-175 Amp. IR Alternators.**  
**ALTERNATOR #S:** CJ5Z10346-D, DS7Z10346-D, DS7T10300-DB; GL-8672.  
**LESTER #S:** 11636.



**39677**  
**6 GROOVE ISOLATOR DECOUPLER PULLEY**  
**REPLACES:** Ford: CJ5Z10344-B, CJ5G-10A352-DA; Tendeco: 920029.  
**DIMENSIONS:** 6-Groove, 46.6 mm L x 17.0 mm Bore x 51.9 mm OD x 22.0 mm Belt, 18.5 mm from Hub to Center of 1st Groove, M14 x 1.5 Thread.  
**APPLICATION:** Ford Escape EcoBoost 1.6L GTDI w/ Heated Seats, Fusion 1.6L 2013-2014, Transit Connection 1.6L 2014.  
**Denso / Ford 150 Amp. IR Alternators.**  
**ALTERNATOR #S:** Denso: 104210-6540; Ford: CJ5Z10346-A, DS7T-10300-EB, DS7Z10346-E.  
**LESTER #S:** 12884.

**HITACHI**

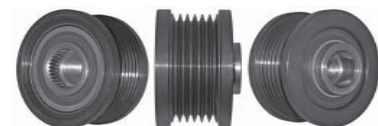

**39525**  
**6 GROOVE CLUTCH PULLEY W /FREE WHEEL**  
**REPLACES:** L1100G-7500, GD216009-2; INA: F232288, 535004410; IKA: 3-3584-1; Nissan: 23151-6N200.  
**DIMENSIONS:** 6-Groove, 39.7 mm L x 17.0 mm Bore x 52.2 / 56.5 mm OD x 21.0 mm Belt x 13.3 mm from Hub to Center of 1st Groove, M16 x 1.5 Thread.  
**APPLICATION:** Nissan Altima - Sentra - X-Trail 2.5L 2002-2006. **Hitachi 110 Amp. IR Alternators.**  
**ALTERNATOR #S:** LR1100-724, B, -726, -734, -734C, -734E; LR1110-713; Bosch Reman.: AL2402X.  
**LESTER #S:** 11119, 11163, 13939.



**HITACHI**



**39526**


**7 GROOVE CLUTCH PULLEY W /FREE WHEEL**

**REPLACES:** L170G-7500, GD215541; INA: F228751, 535005310; IKA: 3-3528-1; Nissan: 23150-2W200, 23150-2W20A.

**DIMENSIONS:** 7-Groove, 39 mm L x 170 mm Bore x 59.5 / 64 mm OD x 26.0 mm Belt x 7 mm from Hub to Center of 1st Groove, M16 x 1.5 Thread.

**APPLICATION:** Nissan Patrol, Terrano 3.0L Diesel. Hitachi 70-90 Amp. IR Alternators.

**ALTERNATOR #S:** LR170-761B, -761C, LR190-752. **LESTER #S:** 23215.



**39527**

**6 GROOVE CLUTCH PULLEY W /FREE WHEEL**

**REPLACES:** GD218089; INA: F232353, F240113, 535006510; IKA: 3-5328-1; Delphi: 10511026; GM: 97186700; Opel: 12-04-366.

**DIMENSIONS:** 6-Groove, 39.6 mm L x 170 mm Bore x 59.7 / 64 mm OD x 22.5 mm Belt x 91 mm from Hub to Center of 1st Groove, M16 x 1.5 Thread.

**APPLICATION:** Opel Astra, Corsa 1.7L Turbo Diesel. Hitachi 100-110 Amp. IR Alternators.

**ALTERNATOR #S:** LR1100-503, -503B, -508, -508B, -508C, -508F; LR1110-502, -503, -503B, -503F. **LESTER #S:** 21832, 23802, 23804.



**39528**

**6 GROOVE CLUTCH PULLEY W /FREE WHEEL**

**REPLACES:** GD218509; INA: F551034, 535009310; IKA: 3-5351-1; Nissan: 23151-EN20A, -EN20B.

**DIMENSIONS:** 6-Groove, 40.3 mm L x 170 mm Bore x 49.9 / 54.0 mm OD x 21.0 mm Belt x 13.3 mm from Hub to Center of 1st Groove, M16 x 1.5 Thread.

**APPLICATION:** Nissan X-Trail 2.0L / 2.5L 2007-2014. Hitachi 110 Amp. IR Alternators.

**ALTERNATOR #S:** LR1110-713B, -717, -717B, -717C. **LESTER #S:** 11163.

**MAGNETON**



**39801**

**REPLACES:** 6020451.

**DIMENSIONS:** 8 Groove, 451 mm L x 17 mm Bore x 60.0 mm OD.

**APPLICATION:** John Deere Skid Steer Loader 270. Magneton 55 Amp. I/R Alternator.

**ALTERNATOR #S:** 443-113-516-241. **LESTER #S:** 12130.



**39802**

**SINGLE "V" GROOVE**

**REPLACES:** 6955.041.

**DIMENSIONS:** 27 mm L x 17 mm Bore x 52 / 85 mm OD.

**APPLICATION:** Atlas Copco Compressors, Ingersoll Rand Compressors, John Deere Skid Loader, Handlers, Power Units, 2.9L Engines.

**Magneton 55 Amp. I/R Alternators.**

**ALTERNATOR #S:** 443-113-515-768; 443-113-516-760, -761, -762, -763, -764, -765.

**LESTER #S:** 12140.

**LUCAS**



**25470**

**SINGLE "V" GROOVE PULLEY**

**DIMENSIONS:** 14.5 mm L x 170 mm Bore x 48 / 72.5 mm OD.


**APPLICATION:** Case Tractors, JCB Excavators, Land Rover Diesel, Massey Ferguson, Perkins.

**Lucas 65 Amp. A127 Alternator.**

**ALTERNATOR #S:** 24157,241 58, 24208, 24220; LRA461; A2514; A2517; Marelli: 633 242 20, 42, 45.

**LESTER #S:** 12045.

**MARELLI**



**39201**

**7 GROOVE SERPENTINE PULLEY**


**DIMENSIONS:** 7 Groove, 370 mm L x 170 mm Bore x 51.9 / 55.9 mm OD x 23.5 mm Belt x 4.2 mm from Hub to Center of 1st Groove.

**APPLICATION:** Land Rover Defender-Discovery 4.0L, Range Rover 4.0L / 4.6L. Lucas-Marelli 100-120 Amp. A127 Type Alternators.

**ALTERNATOR #S:** 63321353, 63340005, 63341353; 54022470; A2528.

**LESTER #S:** 13726, 13727.

**MITSUBISHI**



**39551**


**6 GROOVE CLUTCH PULLEY W/ FREE WHEEL**

**REPLACES:** M628X91371; IKA: 3-3549-1; INA: F232600, 535003510; Mazda: GY02-18-330A, -W37Z

**DIMENSIONS:** 6-Groove, 38.7 mm L x 170 mm Bore x 65.0 mm OD x 21.0 mm Belt, 9 mm from Hub to Center of 1st Groove, M17 x 1.50 Int. Threads.

**APPLICATION:** Ford Probe, B-Series 2.5L, Mazda 626. Ford 6G Series / Mitsubishi ED/IF Alternators.

**ALTERNATOR #S:** A3TB1081, A3TB1081A. **LESTER #S:** 13883.



**39552**


**6 GROOVE CLUTCH PULLEY W /FREE WHEEL**

**REPLACES:** Ford: F32Z10344-B, YM2E10N356-AA, XW4U-10A352-AA, 3395459; F2299744, F229974.5, 535001710; Mazda: GY02-18-330, K801-18-W11; IKA: 3-3534-1.

**DIMENSIONS:** 6-Groove, 38.7 mm L x 170 mm Bore x 65.0 mm OD x 21.0 mm Belt, 9 mm from Hub to Center of 1st Groove, M16 x 1.50 Int. Thread.

**APPLICATION:** Ford Probe 2.5L - Expedition 4.6L / 54L, Lincoln Navigator 4.6L / 54L, Mazda 626, MPV 2.5L. Ford 6G Series / Mitsubishi Alternators.

**ALTERNATOR #S:** 2L7U-10300-AA, 2L7Z10346-AA, 3L74-10300-AA, -BA, 3L7Z10346-AA, -BA; **LESTER #S:** 8303, 8438, 8444, 8516.



**39553**

**6 GROOVE CLUTCH PULLEY W/ FREE WHEEL**

**REPLACES:** INA: F552562, 535014510; IKA: 3-5418-1.

**DIMENSIONS:** 6-Groove, 37 mm L x 170 mm Bore x 54.9 / 59 mm OD x 21 mm Belt, 84 mm from Hu to Center of 1st Groove, uses M17 x 1.50 International Threads.

**APPLICATION:** Ford Crown Victoria w / Police Option 4.6L, Mitsubishi Lancer 2.0L / 24L, Outlander 24L. Mitsubishi 120-190 Amp. I/R Alternators.

**ALTERNATOR #S:** A3TG3181; A4TJ0181ZC, 0182. **LESTER #S:** 11026, 11377, 11543.



**39554**

**6 GROOVE ISOLATOR DECOUPLER PULLEY**

**REPLACES:** A252C5321C, A252C532BC; Tendeco: 920782; IKA: 3-5448-1; GM: 1051565.

**DIMENSIONS:** 6-Groove, 52.5 mm L x 170 mm Bore x 58.5 / 65.0 mm OD x 22.8 mm Belt, 24.5 mm from Hub to Center of 1st Groove, M17 x 1.5 Thread.

**APPLICATION:** Pontiac GTO 6.0L (364-H) 2005. Mitsubishi 130-140 Amp. I/R Alternators.

**ALTERNATOR #S:** A3TG1581. **LESTER #S:** 11097.



**39555**

**6 GROOVE ISOLATOR DECOUPLER PULLEY**


**REPLACES:** A252C5221C; Chrysler: 4861638AA, 4861638AB; Tendeco: 920768.

**DIMENSIONS:** 6-Groove, 52.0 mm L x 170 mm Bore x 58.7 / 63.0 mm OD x 22.5 Belt, 23.5 mm from Hub to Center of 1st Groove, 17 x 1.5 Thread.


**APPLICATION:** Chrysler Pacifica 3.8L 2005-2008. Mitsubishi 140 Amp. I/R Alternator.

**ALTERNATOR #S:** A3TJ0381, ZC, A3TJ1881, ZC. **LESTER #S:** 11115, 11229.


**MITSUBISHI**

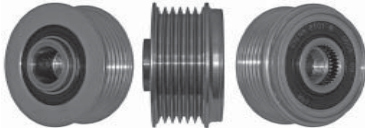


**39556**  
**6 GROOVE CLUTCH PULLEY W /FREE WHEEL**  
**REPLACES:** A628X92171; INA: F238163, F577572, 535009410, 535024610; IKA: 3-5332-1; Mazda: LF18-18-330, LF18-18-W11; Subaru: 23750-AA070.  
**DIMENSIONS:** 6-Groove, 38.3 mm L x 170 mm Bore x 55 / 59 mm OD x 21 mm Belt, 8.5 mm from Hub to Center of 1st Groove, M17 x 1.5 Thread.  
**APPLICATION:** Mazda 6 2.3L, Mitsubishi Lancer / Outlander 2.0L / 24L, Subaru Legacy / Outback 2.5L. **Mitsubishi 90-110 Amp. I/R Alternators.**  
**ALTERNATOR #S:** A2TJ0881; A2TX0881, 1981ZT; A3TG0081, 2881, 6781; A3TJ0181ZC, 0182ZC; A3TL0081; AL4233X.  
**LESTER #S:** 11376, 11556, 13996.



**39557**  
**6 GROOVE ISOLATOR DECOUPLER PULLEY**  
**REPLACES:** A234D037BC; A252C5221C, 5421C, 5511C; Chrysler: 4891737AB; Tendeco: 920810; IKA: 3-5412-1; INA: 535025610.  
**DIMENSIONS:** 6 Groove, 48.8 mm L x 170 mm Bore x 56.8 / 53 mm OD, 22.6 mm Belt, 9 mm from Hub to Center of 1st Groove, M17 x 1.5 Thread.  
**APPLICATION:** Dodge Sebring, Caliber 2.0L / 24L, Journey 24L, Jeep Compas, Patriot 2.0L / 24L. **Mitsubishi 105-140 Amp. I/R Alternators.**  
**ALTERNATOR #S:** A2TJ0481ZC, A2TX0281, A3TJ2581ZC.  
**LESTER #S:** 11228, 11231, 11440.



**39558**  
**6 GROOVE ISOLATOR DECOUPLER PULLEY**  
**REPLACES:** Chrysler: 5264913AA; Tendeco: 920542.  
**DIMENSIONS:** 6-Groove, 52.5 mm L x 170 mm Bore x 58.5 / 65.0 mm OD x 22.8 mm Belt, 24.5 mm from Hub to Center of 1st Groove, M17 x 1.5 Thread.  
**APPLICATION:** Chrysler / Plymouth Prowler 34L 2001-2002. **Mitsubishi 130 Amp. I/R Alternator.**  
**ALTERNATOR #S:** A3TB1691ZC; Bosch: AL6532X.  
**LESTER #S:** 13955.




**39560**  
**6 GROOVE CLUTCH PULLEY W /FREE WHEEL**  
**REPLACES:** F552714; INA: 535022510; IKA: 3.54711; Mazda: L3M6-18-VV11A, L3M6-18-VV11B.  
**DIMENSIONS:** 6-Groove, 38.3 mm L x 170 mm Bore x 59.0 mm OD x 21 mm Belt, 9.5 mm from Hub to Center of 1st Groove, M16 x 1.5 Thread.  
**APPLICATION:** Mazda 3, Mazdaspeed 3, 6 with 2.3L Turbo. **Mitsubishi 110 Amp. I/R Alternator.**  
**ALTERNATOR #S:** A3TJ1181; Mazda: L3M6-18-300A.  
**LESTER #S:** 11169.




**39561**  
**1-V PULLEY**  
**REPLACES:** A628T19970, 21170, 21172, 44270, 49870, A628T50670.  
**DIMENSIONS:** 13 mm Belt x 74 mm OD x 15 mm Bore.  
**APPLICATION:** Dodge, Ford, Mazda, Mercury, Mitsubishi, Plymouth, **Mitsubishi Alternators.**  
**ALTERNATOR #S:** A1T34672, 41171; A2T02271, 02471, 03072, 03471, 03477, 03972, 04271, 06871, 07577, 13571, 13571A, 13977, 17872, 19677, 19877, 41677, 47371, 47371A, 49972, 49977; A3T41876; A5T00777, 00877, 01577, 01977, 02377, 02777, 16471, 30871, 30977, 31177, 31971, 31971A, 32571, 41477.  
**LESTER #S:** 13182, 13211, 13227, 13231, 13238, 13253, 13238, 13259, 13282, 13292, 13314, 13350, 13432, 14428, 14429, 14430, 14432, 14433, 14437, 14438, 14445, 14700, 14902, 14903, 14910, 14916, 14943.



**39562**  
**6 GROOVE LITENS IDP**  
**REPLACES:** Tendeco: 920032; Chrysler: A252C5761C.  
**DIMENSIONS:** 6-Groove, 40.6 mm L x 170 mm Bore x 51.9 mm OD x 19.8 mm Belt, 12.0 mm from Hub to Center of 1st Groove, M14 x 1.5 Thread.  
**APPLICATION:** Dodge Dart 14L / 2.0L / 24L 2013-2014. **Mitsubishi 120-140 Amp. I/R Alternators.**  
**ALTERNATOR #S:** A2TL0381ZC, A2TX3481; Chrysler: 56029580AA, 56029656AA.  
**LESTER #S:** 11553, 11638.



**39563**  
**7 GROOVE CLUTCH PULLEY W /FREE WHEEL**  
**REPLACES:** A252C564FE; INA: F552386, 535017710; IKA: 3-5411-1; Nissan: 23151-EB301, -EB30A.  
**DIMENSIONS:** 7-Groove, 39.5 mm L x 170 mm Bore x 64.9 / 69.5 mm OD x 25.5 mm Belt, 5.3 mm from Hub to Center of 1st Groove, Uses M17 x 1.50 International Threads.  
**APPLICATION:** Nissan Navara, Pathfinder 2.5L Diesel 2005-On. **Mitsubishi 130-150 Amp. Alternators.**  
**ALTERNATOR #S:** A3TG2681AE, 2681ZE; A3TJ0781.  
**LESTER #S:** 23917, 23918.




**39565**  
**6 GROOVE CLUTCH PULLEY W /FREE WHEEL**  
**DIMENSIONS:** 6-Groove, 35 mm L x 170 mm Bore x 64.5 mm OD x 23 mm Belt.  
**APPLICATION:** Mitsubishi Fuso Medium Trucks FE / FG Series with 4.9L (299) 4M50 Engine. **Mitsubishi 100 Amp. I/R Alternators.**  
**ALTERNATOR #S:** A4TU1081, A4TU1081C, A4TU1593; ME221169, ME224960, ME225013.  
**LESTER #S:** 12568, 12605.



**39564**  
**6 GROOVE CLUTCH PULLEY W /FREE WHEEL**  
**REPLACES:** A252C55075; INA: F557045, 535014610; IKA: 3-5454-1; Nissan: 23151-EL010, 23151-JD20A.  
**DIMENSIONS:** 6-Groove, 39.8 mm L x 170 mm Bore x 53.5 / 501 mm OD x 22.7 mm Belt, 14.2 mm from Hub to Center of 1st Groove, Uses M17 x 1.50 International Threads.  
**APPLICATION:** Nissan Cube 1.8L 2009, Sentra 2.0L, NV200 2.0L, Versa 1.8L 2007-2009, Tilda 1.6L. **Mitsubishi 110 Amp. I/R / Hitachi 140 Amp. I/R Alternators.**  
**ALTERNATOR #S:** A2TJ0281, 0281ZC; A2TH0281; Hitachi: LR1140-801; Bosch Reman.: AL2409X.  
**LESTER #S:** 11343, 24075.




**39566**  
**7 GROOVE LITENS IDP**  
**REPLACES:** Tendeco: 920025; Honda: 31141-5A2-A01, 31141-5A2-A010-M4.  
**DIMENSIONS:** 7-Groove, 40.0 mm L x 170 mm Bore x 57.0 mm OD x 24.5 mm Belt, 9.2 mm from Hub to Center of 1st Groove, M17 x 1.5 Thread.  
**APPLICATION:** Honda Accord 24L CVT 2013-2014. **Mitsubishi 110 Amp. I/R Alternators.**  
**ALTERNATOR #S:** A5T10582ZC, A5T10592ZC; Honda: 31100-5B0-Y02, 31100-5B0-Y02RM.

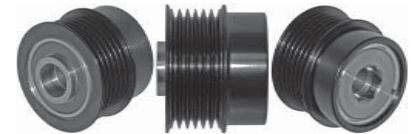

**39567**  
**6 GROOVE ISOLATOR DECOUPLER PULLEY**  
**REPLACES:** Tendeco: 920004.  
**DIMENSIONS:** 6-Groove, 49.5 mm L x 170 mm Bore x 52.5 / 57.0 mm OD x 21 mm Belt. Uses M17 x 1.50 International Threads.  
**APPLICATION:** Ford Crown Victoria w / Police Option 4.6L. **Mitsubishi 190 Amp. I/R Alternator.**  
**ALTERNATOR #S:** A4TJ0181, 0181ZC, 0182, 0182ZC.  
**LESTER #S:** 11026, 11543.  
**NOTE:** Tendeco Upgrade to 39553.

**NIPPONDENSO**



**39502**  
**6 GROOVE CLUTCH PULLEY W /FREE WHEEL**  
**REPLACES:** 021040-0970; INA: F231108, 535002410; IKA: 3-3539-1; Volvo: 9472909.  
**DIMENSIONS:** 6-Groove, 431 mm L x 170 mm Bore x 601 / 55.7 mm OD x 22.7 mm Belt, 15.3 mm from Hub to Center of 1st Groove, M14 x 1.5 Thread.  
**APPLICATION:** Volvo S40, V40 1.9L 2000-2003. **Denso 120 Amp. IR/IF Alternator.**  
**ALTERNATOR #S:** 102211-0500; Bosch: AL9409X.  
**LESTER #S:** 13845.

**NIPPONDENSO**



**39501**

**6 GROOVE LITENS RotorRx IDP**

**REPLACES:** 021040-0990, -1130, -1170, -1320, -1441; 02110-1440; Chrysler: 04861506AB, AD, AC, AE, 04861506AG, 04868430AB, 04868431AB; Tendeco: 920538, 920685, 920834; IKA: 3-5377-1; INA: 535020810; Toyota: **27415-0T010**, -0T011.  
**DIMENSIONS:** 6 Groove, 45.5 mm L x 17 mm Bore x 63.2 / 58.7 mm OD x 22 mm Belt, 91 mm from Hub to Center of 1st Groove, M14 x 1.5 Thread.  
**APPLICATIONS:** Chrysler Town & Country / Dodge Caravan / Plymouth Voyager 3.3L / 3.8L, Chrysler Pasifica 3.5L 2003-2005, 300 3.6L 2012-2014, Dodge Chalanger, Charger, Durango 3.6L, Jeep Grand Cherokee 3.6L, Scion xD 1.8L 2008-2010, Toyota Corolla, Matrix / Pontiac Vibe 1.8L ZZ Engine. **Denso 100-160 Amp. ER Alternators.**  
**ALTERNATOR #'S:** 421000-0011, -0012, -0013, -0021, -0022, -0023, -0024, -0025, -0027, -0028, -0141, -0142, -0222, -0223, -0225, -0300, -0301, -0302, -0303, -0304, -0750; **104210-5480**, -5481, -5490, -5491; Bosch: AL6438X, AL6537X, AL6550X.  
**LESTER #'S:** 11063, 11385, 11386, 11572, 13870, 13871.



**39503**

**6 GROOVE CLUTCH PULLEY W / FREE WHEEL**


**REPLACES:** 021040-0960, 021040-1140; INA: F230051, 535003110; IKA: 3-3535-1.  
**DIMENSIONS:** 6-Groove, 431 mm L x 170 mm Bore x 58.7 / 63.5 mm OD x 22.0 mm Belt, 154 mm from Hub to Center of 1st Groove, M14 x 1.5 Thread.  
**APPLICATION:** Jaguar X-Type 2.5L, 3.0L A/T 2002-2006. **Denso 120 Amp. IR/IF Alternator.**  
**ALTERNATOR #'S:** 102211-0870; Jaguar: C2S3710.  
**LESTER #'S:** 13926.



**39504**

**6 GROOVE LITENS RotorRx IDP**

**REPLACES:** 021040-1370; GM: 22732028; Tendeco: 920762.  
**DIMENSIONS:** 6-Groove, 431 mm L x 170 mm Bore x 63 / 58 mm OD x 23 mm Belt, 91 mm from Hub to Center of 1st Groove, M14 x 1.5 Thread, CCW.  
**APPLICATION:** Chevrolet Cobalt SS, Saturn Ion Red Line 2.0L (I22-P) Supercharged Engine 2004-2005. **Denso 100 Amp. IR/IF Alternator.**  
**ALTERNATOR #'S:** **104210-4140**, -4410; GM: 22731358.  
**LESTER #'S:** 11109.



**39505**

**6 GROOVE LITENS RotorRx ISOLATOR DECOUPLER PULLEY**


**REPLACES:** 021040-1110, -1190, -1450; 121041-1450; Chrysler: 53013554AD, AE; Tendeco: 920720; INA: 535017410; IKA: 3-3594-1.  
**DIMENSIONS:** 6 Groove, 45.0 mm L x 17.0 mm Bore x 57.5 / 63.0 mm OD x 21.7 mm Belt, 94 mm from Hub to Center of 1st Groove, M14 x 1.5 Thread.  
**APPLICATION:** Jeep Liberty KJ 2.8L Diesel DOHC, 24L, Wrangler 24L, Cherokee 2.5L / 2.8L Diesel. **Denso 117-136 Amp. ER/IF Alternators.**  
**ALTERNATOR #'S:** **104210-4240**, -4241; **121000-3490**, -3841, -3842, -3843, -3850, -3851, -4240, -4390, -4520; **421000-0081**, -0086.  
**LESTER #'S:** 11114, 13444, 13960, 13961, 23798, 23830.



**39506**

**7 GROOVE LITENS RotorRx IDP**

**REPLACES:** 021040-1970; Tendeco: 920726, 920954\*; INA: 535020910; Toyota: **27415-0W010**, -0W10A, -0W010B, -0W10C, -0W130\*; IKA: 3-5415-1.  
**DIMENSIONS:** 7-Groove, 431 mm L x 170 mm Bore x 53.7 / 601 mm OD x 26 mm Belt, 9.2 mm from Hub to Center of 1st Groove, M14 x 1.5 Thread.  
**APPLICATION:** Toyota Avalon-HighlanderSienna-RAV4-Venza 3.5L, Lexus GS300 3.0L-ES350-GS350-IS350 3.5L-RX450H. **Denso 100-150 Amp. IR/IF Alternators.**  
**ALTERNATOR #'S:** **104210-2050**, -2051, -2140, -2141, -4470, -4471, -4570, -4571, -4680.  
**LESTER #'S:** 11136, 11137, 11196, 11325.  
**NOTE:** \*Wet Clutch Replacement.



**39507**

**7 GROOVE LITENS RotorRx IDP**


**REPLACES:** Toyota: 27415-0W40, -0W040A, -0W040B, -0W040C, -0W041; Tendeco: 920802; IKA: 3-5378-1; INA: 535019810.  
**DIMENSIONS:** 7-Groove, 50.0 mm L x 17.0 mm Bore x 55.0 / 61.3 mm OD x 24.2 mm Belt, 9.0 mm from Hub to Center of 1st Groove, M14 x 1.5 Thread.  
**APPLICATION:** Pontiac Vibe 24L, Toyota Camry, Corolla, Highlander, Matrix, RAV-4, Solara 24L 2004-2009, Scion XB 24L 2008-2009, Suzuki Grand Vitara 1.9L Diesel. **Denso 90-100 Amp. IR/IF Alternator.**  
**ALTERNATOR #'S:** **104210-3780**, -4660, -4790, -4810, -4811, -4880, -4881; Bosch Reman.: AL3321X.  
**LESTER #'S:** 11088, 11195, 11201, 24020.



**39508**

**6 GROOVE LITENS RotorRx IDP**


**REPLACES:** 021040-1700; Tendeco: 920844.  
**DIMENSIONS:** 6-Groove, 50.0 mm L x 17.0 mm Bore x 62.5 mm OD x 21.5 mm Belt, 9.0 mm from Hub to Center of 1st Groove, M14 x 1.5 Thread.  
**APPLICATION:** Chevrolet Impala Police Car 3.9L 2006-2007. **Denso 150 Amp. IR/IF Alternator.**  
**ALTERNATOR #'S:** 104210-5380; GM: 15846253.  
**LESTER #'S:** 11237.



**39509**

**6 GROOVE ISOLATOR DECOUPLER PULLEY**


**REPLACES:** 021040-1840, -1841; Tendeco: 920893.  
**DIMENSIONS:** 6-Groove, 41.2 mm L x 17.0 mm Bore x 56.5 / 64.0 mm OD x 23.0 mm Belt, 15.0 mm from Hub to Center of 1st Groove, Thread M14 x 1.5.  
**APPLICATION:** Buick Lucerne, Cadillac STC 3.0L, 3.6L, 3.9L 2009, Buick Enclave, Chevrolet Traverse, GMC Acadia, Saturn Outlook 3.6L. **Denso 140-170 Amp. IR/IF Alternators.**  
**ALTERNATOR #'S:** **104210-5390**, -6160, -6310.  
**LESTER #'S:** 11252, 11369.



**39510**

**6 GROOVE CLUTCH PULLEY W / FREE WHEEL**

**REPLACES:** INA: F236151, 535017410; Chrysler: 53013579AA.  
**DIMENSIONS:** 6-Groove, 37.7 mm L x 17.0 mm Bore x 57.2 / 61.0 mm OD x Belt 20.0 mm, 11.5 mm from Hub to Center of 1st Groove, M14 x 1.5 Thread.  
**APPLICATION:** Dodge Dakota 4.7L 2003-2004, Jeep Grand Cherokee 4.7L 2003-2004, Liberty 24L / 3.7L, Wrangler 24L 2002-2006. **Denso 136 Amp. IR/IF Alternators.**  
**ALTERNATOR #'S:** **121000-4520**, -4540, -4550, -4551.  
**LESTER #'S:** 13873CP, 13961.  
**NOTE:** Clutch Replacement for 39505.



**39511**

**7 GROOVE ISOLATOR DECOUPLER PULLEY**

**REPLACES:** Toyota: **27415-0W050**, -0W051, -0W052, -0W052A; Tendeco: 920833.  
**DIMENSIONS:** 7-Groove, 50 mm L x 15.0 mm Bore x 53.7 / 60 mm OD x Belt 25 mm, M14 x 1.5 Thread.  
**APPLICATION:** Toyota Tacoma 2.7L 2007-2010. **Denso 80 Amp. IR/IF Alternators.**  
**ALTERNATOR #'S:** 104210-8230, 104210-8232; Toyota: **27060-75410**, -75411, -75412.  
**LESTER #'S:** 11354.


**NIPPONDENSO**



**39512**

**4 GROOVE ISOLATOR DECOUPLER PULLEY**

**REPLACES:** 021040-1891; Toyota: 27415-0W120; 27415-0W120A, -0W120B; Tendeco: 920905.  
**DIMENSIONS:** 4-Groove, 40.5 mm L x 17.0 mm Bore x 55.2 / 60.5 mm OD x Belt 16.0 mm, 20.5 mm from Hub to Center of 1st Groove, M14 x 1.5 Thread.  
**APPLICATION:** Toyota Camry 2.5L 2009-2012, Venza 2.7L 2009. **Denso 100 Amp. IR/IF Alternators.**  
**ALTERNATOR #’S:** 104210-2630, 104210-2650; Toyota: 27060-0V060, 27060-36050.  
**LESTER #’S:** 11516, 11519.



**39513**

**6-GROOVE ISOLATOR DECOUPLER PULLEY**

**REPLACES:** 021040-1811; Toyota: 27415-0W020, 27415-0W020A, 27415-0W021; Tendeco: 920906.  
**DIMENSIONS:** 6-Groove, 17.0 mm Bore x 55 mm OD, 9.0 mm from Hub to Center of 1st Groove, M14 x 1.5 Thread.  
**APPLICATION:** Lexus RX350, RX450h, Scion tC 2.5L 2011-2014, Toyota Camry 2.5L 2012-2014, RAV4 2.5L 2009-2014, Highlander 2.7L 2014, Sienna 2.7L 2012. **Denso 100-150 Amp. IR/IF Alternators.**  
**ALTERNATOR #’S:** 104210-1260, -2270, -2340; 104211-3161; Toyota: 27060-0V010, -0V170, -36010, -36060, -36061, -36080.  
**LESTER #’S:** 11402, 14486.



**39514**

**6-G LITENS ISOLATOR DECOUPLER PULLEY**

**REPLACES:** Toyota: 27415-0W110; Tendeco: 920907.  
**DIMENSIONS:** 6-Groove, 41.5 mm L x 17.0 mm Bore x 58.5 / 64.0 mm OD x 23.0 mm Belt, 12.5 mm from Hub to Center of 1st Groove, Thread M14 x 1.5.  
**APPLICATION:** Toyota Highlander, Venza 2.7L 2009-On. **Denso 100-150 Amp. IR/IF Alternators.**  
**ALTERNATOR #’S:** 104210-2350, -2360, -2560; Toyota: 27060-0V020, -0V030, -36020, -36030.  
**LESTER #’S:** 11384, 11403, 11407, 11408.



**39516**

**REPLACES:** 021041-7110.  
**DIMENSIONS:** 7-Groove, 36 mm L x 17.0 mm Bore x 65 mm / 71.5 mm OD x 26.5 mm Belt.  
**APPLICATION:** Dodge B Series Vans, D Series Pickups, Dakota, Ram, Jeep Grand Cherokee 5.2L. **Denso 40-120 Amp. IR/IF Alternators.**  
**ALTERNATOR #’S:** 121000-3460, -3470, -4130.  
**LESTER #’S:** 13353, 13354, 13453.




**39515**

**REPLACES:** 021041-6950.  
**DIMENSIONS:** 6-Groove, 31.5 mm L x 17.0 mm Bore x 57 mm / 63 mm OD x 21 mm Belt.  
**APPLICATION:** Cadillac 3.6L, Chevrolet Equinox / Pontiac Torrent 3.4L, Chrysler / Dodge, Hyundai / Kia 3.3L / 3.8L, Jeep, Lexus / Toyota 3.0L. **Denso 40-100 Amp. IR/IF Alternators.**  
**ALTERNATOR #’S:** 100211-8840, -8841; 101211-5450, -5560, -5610, -7440, -7450, -7800, -7860, -7861, -9150, -9160, -9350, -9410, -9710, -9711; 102211-0590, -0650, -1620; 104210-3320, -4350, -5070; 121000-3440, -3450, -3452, -3480, -3510, -3570, -3580, -3600, -3610, -3620, -3670, -3671; 421000-0360, -0363, -0470, -0550, -0552.  
**LESTER #’S:** 11033, 11046, 11155, 11156, 11191, 11240, 11241, 13341, 13442, 13443, 13545, 13546, 13552, 13578, 13669, 13706, 13747, 13748, 13791, 13822, 13834, 13844, 13856, 13905, 13927, 13956, 13983.




**39517**

**REPLACES:** 021041-5520, 021041-6610.  
**DIMENSIONS:** 4-Groove, 25.0 mm L x 17.0 mm Bore x 63.5 mm / 69.0 mm OD x 15.0 mm Belt x 8.0 mm from Hub to Center of 1st Groove.  
**APPLICATION:** Acura, Chrysler / Dodge / Plymouth, Honda, Suzuki. **Denso 40-120 Amp. Alternators.**  
**ALTERNATOR #’S:** 100211-8550; 101211-5410, -5420, -5430, -5690, -9250, -9310, -9330, -9810, -9970; 102211-1260, -1270; 121000-3300, -3340, -3380, -3430, -4000, -4050.  
**LESTER #’S:** 11100, 13184, 13185, 13245, 13280, 13309, 13353, 13395, 13529, 13540, 13674, 13677.



**39518**

**REPLACES:** 021041-6490.  
**DIMENSIONS:** 5-Groove, 29.0 mm L x 17.0 mm Bore x 65.0 mm / 69.5 mm OD x 18.0 mm Belt.  
**APPLICATION:** Chrysler / Dodge / Plymouth, Acura Legend 3.2L-NSX 3.0L, Honda Accord 2.2L Prelude 2.3L. **Denso 40-120 Amp. Alternators.**  
**ALTERNATOR #’S:** 100211-6150, -6170, -6190, -8020, -8030, -8150, -8151, -8190, -8710, -8750, -8770; 101211-5840, -5870, -7220, -7230, -7270, -7570, -9140, -9860; 121000-3310, -3390, -4010, -4060.  
**LESTER #’S:** 13305, 13306, 13308, 13310, 13319, 13323, 13325, 13386, 13387, 13388, 13507, 13675, 13684, 13685, 13714, 13737, 13738.



**39519**

**REPLACES:** 021040-0800, 021041-8040, 021041-9630.  
**DIMENSIONS:** 7-Groove, 36.0 mm L x 17.0 mm Bore x 58 mm / 63 mm OD x 26 mm Belt.  
**APPLICATION:** Dodge B Series Vans, Trucks, Jeep Grand Cherokee 5.2L / 5.9L, Toyota. **Denso 90-136 Amp. ER/IF Alternators.**  
**ALTERNATOR #’S:** 100211-6370; 101211-7400; 104210-3760, -3880; 121000-3530, -3531, -3630, -3760, -4170, -4171, -4220, -4221, -4290, -4291, -4300, -4350, -4351.  
**LESTER #’S:** 11034, 11088, 13354, 13566, 13742, 13823, 13824, 13861, 13910, 13911, 13914, 13915.




**39520**

**REPLACES:** 021041-5490.  
**DIMENSIONS:** 2-Groove, 35.0 mm W x 17.0 mm Bore x 53 mm / 74.6 mm OD x 10 mm Belt.  
**APPLICATION:** Chrysler / Dodge / Plymouth. **Denso 75-120 Amp. ER/IF Alternators.**  
**ALTERNATOR #’S:** 121000-3100, -3330, -3360, -3370, -3410, -4030, -4040, -4041, -4100.  
**LESTER #’S:** 13185, 13256, 13301, 13312, 13313, 13353.



**39521**


**REPLACES:** 021041-5530, -6300, -7540, -7590.  
**DIMENSIONS:** 6-Groove, 31.0 mm L x 17.0 mm Bore x 65.0 / 71.5 mm OD x 22.0 mm Belt.  
**APPLICATION:** Chrysler / Dodge / Plymouth / Jeep, Acura 2.2L / Honda / 2.3L / 3.5L, Isuzu Oasis 2.3L, Lexus ES300 / Toyota 3.0L. **Denso 80-136 Amp. ER/IF Alternators.**  
**ALTERNATOR #’S:** 101211-5480, -5490, -5500, -5620, -7170, -7520, -7670, -7750, -7840, -7850, -7851, -9060, -9100, -9120, -9600, -9780, -9990; 102211-1010, -1020, -1021, -1710; 121000-2520, -3400, -3520, -3521, -3523, -3660, -4070, -4120, -4122, -4160, -4161, -4231, 1-4232, -4233, -4270, -4330, -4331, -4332, -4510, -4580; 421000-0060, -0061, -0062, -0120, -0121, -0122, -0230.  
**LESTER #’S:** 11240, 13306, 13307, 13311, 13538, 13539, 13558, 13593, 13594, 13695, 13706, 13722, 13746, 13747, 13755, 13763, 13765, 13767, 13769, 13776, 13806, 13842, 13844, 13868, 13923, 13964.



**39522**

**5 GROOVE CLUTCH PULLEY W /FREE WHEEL**  
**REPLACES:** INA: F568860, 535018010; IKA: 3-5395-1; Toyota: 27411-33050, 27415-33010.  
**DIMENSIONS:** 5-Groove, 39.5 mm x 15 mm Bore x 66.5 / 60 mm OD, Belt 19 mm, 9 mm from Hub to Center of 1st Groove. M14 x 1.5 Thread.  
**APPLICATION:** Toyota Yaris 14L Turbo Diesel. **Denso 70 Amp. Alternator.**  
**ALTERNATOR #’S:** 102211-5660; Toyota: 27060-33020.  
**LESTER #’S:** 23858.


**NIPPONDENSO**



**39523**  
**5 GROOVE CLUTCH PULLEY W / FREE WHEEL**  
**REPLACES:** 021040-1210; INA: F582200, 535021810; Koyo: WCPN36RC4X; IKA: 3-5462-1.  
**DIMENSIONS:** 5-Groove, 39.5 mm L x 170 mm Bore x 59.0 / 55.5 mm OD, Belt 19.0 mm, 11.2 mm from Hub to Center of 1st Groove, M14 x 1.5 Thread.  
**APPLICATION:** Volvo S40, V50 24L / 2.5L, C70 2.5L 2004-2006. **Denso 150 Amp. IR Alternators.**  
**ALTERNATOR #S:** 104210-4050, 104210-4640.  
**LESTER #S:** 11054, 11093.




**39524**  
**6-GROOVE LITENS IDP**  
**REPLACES:** Honda: 31141-RV0-A010-M4; Tendeco: 920993.  
**DIMENSIONS:** 6 Groove, 40.5 mm L x 170 mm Bore x 70.5 / 65.5 mm OD x 21 mm Belt, 13.0 mm from Hub to Center of 1st Groove, M16 x 1.5 Thread.  
**APPLICATION:** Acura MDX, Honda Accord, Odyssey, Pilot with 3.5L V6 VCM Engine 2011, Ridgeline 3.5L VCM 2012. **Denso CSJ24 Alternators.**  
**ALTERNATOR #S:** 104210-1240; Honda: 31100-RV0-A01.  
**LESTER #S:** 11573.



**39530**  
**6 GROOVE CLUTCH PULLEY W / FREE WHEEL**  
**REPLACES:** INA: F570680, 535018210; IKA: 3-5451-1; Koyo: WCPN36RDXX.  
**DIMENSIONS:** 6-Groove, 44.6 mm L x 170 mm Bore x 53.0 / 49.1 mm OD, Belt 22.6 mm, 18.0 mm from Hub to Center of 1st Groove, Fitting Length - 12.0 mm, M14 x 1.5 Thread.  
**APPLICATION:** Ford Focus, GMax 1.8L / 2.0L, Volvo C30, S40, V50 1.8L. **Denso 120-150 Amp. Alternators.**  
**ALTERNATOR #S:** 104210-2750, -3760, -3761, -3762, -3820, -3821, -5770.  
**LESTER #S:** 23839, 24070.



**39701**  
**8 GROOVE CLUTCH PULLEY W / FREE WHEEL**  
**REPLACES:** 021040-1631; IKA: 3-5451-1.  
**DIMENSIONS:** 8-Groove, 39.5 mm L x 170 mm Bore x 65.0 / 60.0 mm OD, Belt 29.0 mm, 8.5 mm from Hub to Center of 1st Groove, Fitting Length - 12.0 mm, M14 x 1.5 Thread.  
**APPLICATION:** Dodge Ram 6.7L Diesel 2007-2013. **Denso 145-220 Amp. ER Alternators.**  
**ALTERNATOR #S:** 421000-0510, -0512, -7000, -7001; Bosch: AL6474X.  
**LESTER #S:** 11378, 11379.

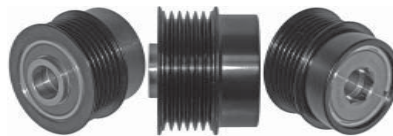

**39559**  
**6 GROOVE ISOLATOR DECOUPLER PULLEY**  
**REPLACES:** 021040-2090; Tendeco: 920971; Chrysler: 58184136AB.  
**DIMENSIONS:** 6-Groove, 39.5 mm L x 170 mm Bore x 52.0 mm OD, 22 mm Belt, 9.0 mm from Hub to Center of 1st Groove, M14 x 1.5 Thread.  
**APPLICATION:** Chrysler 200, 300, Town & Country 3.6L, Dodge Avenger, Charger, Durango, Grand Caravan, Journey, Ram 1500 3.6L, Jeep Grand Cherokee 3.6L. **Denso 130-160 ER Alternators.**  
**ALTERNATOR #S:** 421000-0512, 421000-0770.  
**LESTER #S:** 11570, 11572.



**39702**  
**6 GROOVE CLUTCH PULLEY W / FREE WHEEL**  
**DIMENSIONS:** 6-Groove, 39.0 mm L x 170 mm Bore x 65 / 60 mm OD, Belt 21 mm, 12 mm from Hub to Center of 1st Groove, M14 x 1.5 Thread.  
**APPLICATION:** Hyundai Sonata 24L 2006-2009, Kia Optima, Rondo 24L 2007-2009. **Poonsung 110 Amp. IR Alternator.**  
**ALTERNATOR #S:** 02131-9132; Hyundai: 37300-25310.  
**LESTER #S:** 11202.




**39703**  
**6 GROOVE LITENS IDP**  
**REPLACES:** 021040-2100; Chrysler: 05184692AB, 05184692AA, 56029623AA; Tendeco: 920972.  
**DIMENSIONS:** 6-Groove, 39.5 mm L x 170 mm Bore x 52.0 mm OD, 9.04 mm from Hub to Center of 1st Groove, M14 x 1.5 Thread.  
**APPLICATION:** Dodge Charger, Durango 3.6L 2011-2014, Jeep Grand Cherokee 3.6L 2011-2014. **Denso 180-220 Amp. ER Alternators.**  
**ALTERNATOR #S:** 421000-7040, 421000-7050.  
**LESTER #S:** 11592, 11598.



**39704**  
**7 GROOVE CLUTCH PULLEY W / FREE WHEEL**  
**REPLACES:** INA: 535023210, F585322; IKA: 3-5424-1; Toyota: 27415-26010, -30010.  
**DIMENSIONS:** 7-Groove, 42.0 mm L x 15.0 mm Bore x 63.5 / 57.5 mm OD, Belt 25.5 mm, 10.9 mm from Hub to Center of 1st Groove, M14 x 1.5 Thread.  
**APPLICATION:** Toyota Hilux 2.5L Turbo Diesel (2KDFTV), Landcruiser 3.0L Diesel 2003-On. **Denso 100-130 Amp. IR Alternators.**  
**ALTERNATOR #S:** 102211-2310; 104210-2390, -3410, -3411, -3412, -3413, -4591, -4770, -5440, -5450.  
**LESTER #S:** 20226, 23313, 23947, 24056.



**39750**  
**6 GROOVE LITENS IDP**  
**REPLACES:** 021040-1380; GM: 12665786; Saab: 55567913; Tendeco: 920040.  
**DIMENSIONS:** 6-Groove, 40.8 mm L x 170 mm Bore x 56.9 / 64.9 mm OD x 22.2 mm Belt, 9.8 mm from Hub to Center of 1st Groove, M14 x 1.5 Thread.  
**APPLICATION:** Chevrolet Equinox / GMC Terrain 3.6L 2013-2015, Cadillac SRX 3.6L 2012-2015, SRX 2.8L, Saab 9-5 2.8L 2010-2011. **Denso 150 Amp. Alternators.**  
**ALTERNATOR #S:** 104211-8160; GM: 13502584, 22988006.  
**LESTER #S:** 11507, 11647.



**49501**  
**7 GROOVE CLUTCH PULLEY W / FREE WHEEL**  
**REPLACES:** 021040-1020, 021040-1070; IKA: 3-5379-1, 3-5394-1; INA: 535017310, F567525; Toyota: 27415-0L010, 27415-0L030, 27415-30020.  
**DIMENSIONS:** 7-Groove, 414 mm L x 15.0 mm Bore x 65.0 / 58.0 mm OD, Belt 25.6 mm, 10.9 mm from Hub to Center of 1st Groove, M14 x 1.5 Thread.  
**APPLICATION:** Toyota Hilux 2.5L Turbo Diesel (2KDFTV), Landcruiser 3.0L Diesel 2001-2010. **Denso 70-85 Amp. IR Alternators.**  
**ALTERNATOR #S:** 102211-2810, -5600; 104210-8020.  
**LESTER #S:** 23313, 23317, 23558.

**VALEO**



**39301**  
**REPLACES:** 592818, 941814.  
**DIMENSIONS:** 6 Groove, 370 mm L x 170 mm Bore x 60.87 mm OD x 4.59 mm H.  
**APPLICATION:** Mercedes with 2.5L Diesel. **Valeo 70 Amp. Alternators.**  
**ALTERNATOR #S:** A13V 02, 05, 07; 436120; AL65V.  
**LESTER #S:** 13707.



**39302**  
**REPLACES:** 521966, 592961.  
**DIMENSIONS:** 6 Groove, 32.6 mm L x 170 mm Bore x 61.66 mm OD x 4.29 mm H.  
**APPLICATION:** BMW 318i, 318ic, 525i, 525iT. **Valeo 105-140 Amp. Internal Fan Alternators.**  
**ALTERNATOR #S:** A14V13, A14V15, A14V16; AL9360X.  
**LESTER #S:** 13466, 13467, 13628.

**VALEO**



**39303**  
**REPLACES:** 940787  
**DIMENSIONS:** 284 mm L x 17 mm Bore x 69.9 mm OD.  
**APPLICATION:** Audi 100, A4; VW Golf, Jetta, Passat.  
**Paris Rhone 65 Amp. Alternators.**  
**ALTERNATOR #'S:** A13E45; 940375, 9400305.  
**LESTER #'S:** 14875.




**39304**  
**REPLACES:** 593602.  
**DIMENSIONS:** 50.0 / 55.0 mm OD x 170 mm Bore, 49.5 mm OL x 20.0 mm Belt / 6-Groove.  
**APPLICATION:** BMW 325i, 330i, 525i, 530i, M3 Coupe, X5, Z3 Roadster, Z4 Roadster.  
**Valeo 80-140 Amp. Alternators.**  
**ALTERNATOR #'S:** A13Vi54, 60, 119, 132, 140, 160, 180; SG9B029, 052; SG12B029; SG14B019, 020.  
**LESTER #'S:** 11098, 11122, 13470, 13662, 13848, 13970, 13971, 23120.



**39306**  
**REPLACES:** 593592.  
**DIMENSIONS:** 5 Groove, 30.6 mm L x 170 mm Bore x 56.0 / 61.5 mm OD x 19.5 mm Belt.  
**APPLICATIONS:** Audi A4, VW Passat 1.8L Turbo / 2.8L.  
**Valeo 70-120 Amp. IR/IF Alternators.**  
**ALTERNATOR #'S:** SG8B010, SG9B010, SG12B018.  
**LESTER #'S:** 13930, 13931, 22972.




**39307**  
**REPLACES:** 593593.  
**DIMENSIONS:** 6 Groove, 28.6 mm L x 170 mm Bore x 69.9 mm OD x 7.2 mm from Hub to Center of 1st Groove.  
**APPLICATIONS:** Audi A4-A6S4, Volkswagen Passat.  
**Valeo 90-140 Amp. IR/IF Alternators.**  
**ALTERNATOR #'S:** SG9B011, 027; SG12B011, 025, 054; SG14B012, 013; 2542233, 2542323.  
**LESTER #'S:** 11159, 13932, 13933.

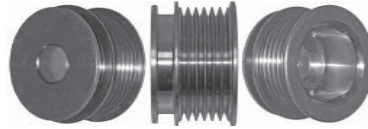

**39308**  
**REPLACES:** 593594.  
**DIMENSIONS:** 6 Groove.  
**APPLICATIONS:** Audi A4 / A4 Quattro 1.8L Turbo, A6 / A6 Quattro 4.2L, Volkswagen Passat 1.8L.  
**Valeo 120 Amp. IR/IF Alternator.**  
**ALTERNATOR #'S:** SG12B016; VW: 077-903-015H.



**39309**  
**REPLACES:** 593595.  
**DIMENSIONS:** 6 Groove, 33.5 mm L x 170 mm Bore x 62.0 / 67.0 mm OD x 9.0 mm from Hub to Center of 1st Groove x 23 mm Belt.  
**APPLICATIONS:** Hyundai Sonata-Santa Fe 2.5L / 2.7L, Kia Optima 2.5L / 2.7L.  
**Valeo 90 Amp. IR/IF Alternator.**  
**ALTERNATOR #'S:** SG9B025; Hyundai: 37300-27295.  
**LESTER #'S:** 13945.

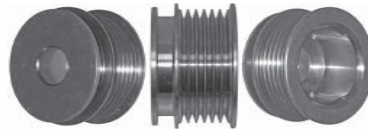

**39310**  
**REPLACES:** 593596.  
**DIMENSIONS:** 6 Groove, 37.5 mm L x 17 mm Bore x 55.5 mm OD.  
**APPLICATIONS:** Mercedes GCLKSLK-E Class.  
**Valeo 120 Amp. IR/IF Alternators.**  
**ALTERNATOR #'S:** SG12B021, SG12B022, 439296.  
**LESTER #'S:** 23096.



**39311**  
**REPLACES:** 593597.  
**DIMENSIONS:** 6 Groove, 30.0 mm L x 170 mm Bore x 50.0 / 55.0 mm OD x 19.5 mm Belt.  
**APPLICATIONS:** Chrysler Crossfire 3.2L, Mercedes GCLKSLK-E Class 3.2L.  
**Valeo 120 Amp. IR/IF Alternators.**  
**ALTERNATOR #'S:** SG12B023, SG12B024; AL0787V.  
**LESTER #'S:** 11123, 13928.



**39312**  
**REPLACES:** 593599, 593853.  
**DIMENSIONS:** 6 Groove, 370 mm L x 170 mm Bore x 60.6 mm OD x 13.6 mm Hub to Center of 1st Groove.  
**APPLICATIONS:** Audi TT / VW Beetle-GolfJetta.  
**Valeo 80-90 Amp. IR/IF Alternators.**  
**ALTERNATOR #'S:** A13Vi181; SG8B011, 015, 016, 029; SG9B013, 018, 019, 049, 055; AL0188V.  
**LESTER #'S:** 13946, 21485, 22911, 22995, 22997, 23357.




**39313**  
**6-GROOVE CLUTCH PULLEY W/FREE WHEEL**  
**REPLACES:** 593600, 593999, 2602911; INA: F227628, F553470, 535001210; IKA: 3-3520-1; Hitachi: GD214998; Magneton: 138600.601; Toyota: 27039-0D030; VW: 022-903-119A, -119C, 038-903-119A, -119T.  
**DIMENSIONS:** 6 Grooves, 42.5 mm L x 170 mm Bore x 61.5 / 56 mm OD x 22 mm Belt, 15.3 mm from Hub to Center of 1st Groove, M16 x 1.5 Thread.  
**APPLICATION:** Audi TT - A3, VW Beetle - Golf - Jetta - Passat - Touran, MC Smart 1.5L, Mercedes Trucks. **Valeo 70-150 Amp. IR Alternators.**  
**ALTERNATOR #'S:** A13Vi285, 289, 292, 297; SG12B015, 090; SG8B013, 027; SG9B015, 078; SG10B032; TG11C017, 036; TG14C011, 015, 016, 023; TG15C057, 121; AL0189X, AL0723X.  
**LESTER #'S:** 11019, 11149, 13947, 21473, 23355, 23874.  
**NOTE:** This is the same Pulley as Bosch's 391007.



**39314**  
**REPLACES:** 593611, 2548185, 2650296.  
**DIMENSIONS:** 6 Groove, 275 mm L x 170 mm Bore x 56.5 / 64.5 mm OD x 4.5 mm from Hub to Center of 1st Groove x 21 mm Belt.  
**APPLICATIONS:** Aztek / Rendezvous, Chevrolet Venture / Oldsmobile Silhouette / Pontiac Montana, Saturn Vue 3.5L, Nissan Maxima 3.5L.  
**Valeo 105-125 Amp. IR/IF Alternators.**  
**ALTERNATOR #'S:** SG10B018; SG10S030, 035, 037, 038, 042, 057, 084; SG12B041; SG12S050, 057, 070, 072, 074, 075, 083, 084, 104, 114, 120; TG12C014, 115; FG12S019, 020, 028, 033; FG15S51, 084, 097, 098.  
**LESTER #'S:** 11017, 13865, 13866, 13938, 13993.




**39315**  
**REPLACES:** 593699.  
**DIMENSIONS:** 6 Groove, 56.0 mm L x 170 mm Bore x 51.0 / 56.8 mm OD x 34.0 mm from Hub to Center of 1st Groove.  
**APPLICATIONS:** BMW 318i, 318ic, 318is, 318ti, Z3 1.9L.  
**Valeo 80 Amp. IR/IF Alternators.**  
**ALTERNATOR #'S:** A13Vi78, 439007; Bosch: AL0736X.  
**LESTER #'S:** 13664.



**39316**  
**REPLACES:** 593717, 2546731.  
**DIMENSIONS:** 6 Groove, 30.0 mm L x 170 mm Bore x 63.0 / 67.0 mm OD x 22 mm Belt x 8.0 mm from Hub to Center of 1st Groove.  
**APPLICATIONS:** Chevrolet Corvette 5.7L 1997-2004.  
**Valeo 150 Amp. IR/IF Alternators.**  
**ALTERNATOR #'S:** A14Vi21; TG15C052, 014; TG15S11.  
**LESTER #'S:** 13721, 13968.

**VALEO**



**39317**

**6-GROOVE ISOLATOR DECOUPLER PULLEY**

**REPLACES:** 2548266A, B, C, D, 2601499A, 2601628A, B; Tendeco: 920667.

**DIMENSIONS:** 6 Groove, 51.05 mm L x 170 mm Bore x 68.9 / 71.8 mm OD x 21.5 Belt x 6.8 mm from Hub to Center of 1st Groove, M16 x 1.5 Thread.

**APPLICATIONS:** Chevrolet Corvette 5.7L, 6.0L, 7.0L.

**Valeo 150 Amp. IR/IF Alternators.**

**ALTERNATOR #'S:** A14V139; TG15C013, 051; TG15S10.

**LESTER #'S:** 13864, 13969.



**39318**

**REPLACES:** 2548667.

**DIMENSIONS:** 5 Groove, 23.7 mm L x 170 mm Bore x 60.7 / 56.3 mm OD x 174 mm Belt.

**APPLICATIONS:** GM Vans 34L, Saturn Ion - Vue, Chevrolet Cavalier / Oldsmobile Alero / Pontiac Sunfire, Pontiac G6, Solstice / Saturn Sky.

**Valeo 105-125 Amp. IR/IF Alternators.**

**ALTERNATOR #'S:** SG10S028, 034, 036, 044; SG12S056, 071, 074; TG11C046; TG11S010; TG13S016, 026.

**LESTER #'S:** 11072, 11144, 13943, 13944.



**39319**


**DIMENSIONS:** 6 Groove, 274 mm L x 170 mm Bore x 70.5 / 66.5 mm OD x 19.8 mm Belt.

**APPLICATIONS:** GM Vans with 34L Engine.

**Valeo 105 Amp. IR/IF Alternators.**

**ALTERNATOR #'S:** SG10S029, 2542558.

**LESTER #'S:** 13993.



**39320**

**5-GROOVE CLUTCH PULLEY W/FREE WHEEL**

**REPLACES:** 593490; INA: F552698.02, 535000510; IKA: 33541-1; VW: 022-903-119B, -119D; 028-903-119AC, 038-903-119J, -119M.

**DIMENSIONS:** 5 Groove, 34.6 mm L x 170 mm Bore x 60.7 / 55.7 mm OD x 19.0 mm Belt, 13.5 mm from Hub to Center of 1st Groove, M16 x 1.5 Thread.

**APPLICATIONS:** Audi A4 - A6, VW Golf- Passat.

**Valeo 90-140 Amp. IR/IF Alternators.**

**ALTERNATOR #'S:** SG9B017, 042; SG12B010, 012, 049, 074; SG14B011; Bosch Reman.: AL9404X.

**LESTER #'S:** 11159, 11207, 11208, 11212, 22323.

**NOTE:** This is the same Pulley as Bosch's 391026.



**39321**

**7-GROOVE CLUTCH PULLEY W/FREE WHEEL**

**REPLACES:** F00M-391-160; F-00M-991-138, -302; INA: F232001, 535004210; IKA: 3-3568-1; Valeo: 593625; Mercedes: 271-155-00-16, -01-15.


**DIMENSIONS:** 7 Groove, 44.5 mm L x 170 mm Bore x 55.7 / 60.0 mm OD x 26 mm Belt, 14.9 mm from Hub to Center of 1st Groove, M16 x 1.5 Thread.

**APPLICATION:** Mercedes C230, CLK230 1.8L 2003-05.

**Bosch 120-150 Amp. Alternators.**

**ALTERNATOR #'S:** 0-124-515-062, 0-124-515-088; 0-124-615-022, 0-124-615-028; AL0810X.

**LESTER #'S:** 13954, 23285.



**39323**

**6-GROOVE CLUTCH PULLEY W/FREE WHEEL**

**REPLACES:** 2605956, 2650158, 4605956; INA: F239807, F563248.01, F570802, 535024210; IKA: 3-5458-1; GM: 13258483; Opel: 1204177; Saab: 13258483.


**DIMENSIONS:** 6 Groove, 38.0 mm L x 170 mm Bore x 53.7 / 58.9 mm OD x 22.5 mm Belt, 9.8 mm from Hub to Center of 1st Groove, M16 x 1.5 Thread.

**APPLICATIONS:** Aztek / Rendezvous 3.6L, Chevrolet Cruze 14L / 1.8L, Opel, Saab 9-5 2.0L.

**Valeo 125-230 Amp. IR/IF Alternators.**

**ALTERNATOR #'S:** FG12S031, 032, 055, 064, 070, 096; FG18D057, 111; FG18S045, 052; FG23S032, 033; TG12C036, 052, 069, 070, 072, 074, 076, 103, 105, 143, 144, 172, 173, 175, 179, 187, 192, 193, 227; TG13S011, 019, 027.

**LESTER #'S:** 11022, 11399, 11560, 11734, 11832, 20202.

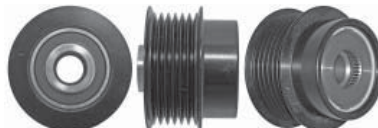

**39324**

**6-GROOVE LITENS RotorRx IDP**

**REPLACES:** 2650406B, 2650406C, 2650537; Tendeco: 920818.

**DIMENSIONS:** 6 Groove, 50.2 mm L x 170 mm Bore x 57.0 / 63.8 mm OD x 23.0 mm Belt x 9.2 mm from Hub to Center of 1st Groove, M16 x 1.5 Thread.

**APPLICATIONS:** Pontiac G6 3.9L (LZ9) writh M/T 2006-2007. **Valeo 125 Amp. IR/IF Alternators.**

**ALTERNATOR #'S:** TG12C040, TG12C043, TG13S023, TG13S028.

**LESTER #'S:** 11143.



**39325**

**REPLACES:** 2548733, 2650297.


**DIMENSIONS:** 6 Groove, 272mm L x 170 mm Bore x 67.5 / 75.0 mm OD x 41 mm from Hub to Center of 1st Groove.

**APPLICATIONS:** Chevrolet Colorado / GMC Canyon.

**Valeo 105 Amp. IR/IF Alternators.**

**ALTERNATOR #'S:** SG10S039, 049, 051; 2650349.

**LESTER #'S:** 11047.



**39326**

**5-GROOVE CLUTCH PULLEY W/FREE WHEEL**

**REPLACES:** 593618, 593930, 260016A, 2602751; INA: F232030, F239809, F553857, 535004510, 535010110; Mercedes: 640-150-00-60, -01-60, -03-60, -04-60, -05-60; 668-155-01-15, -02-15, -06-15; IKA: 3-5329-1, 3-5345-1.


**DIMENSIONS:** 5 Groove, 376 mm L x 170 mm Bore x 49.8 mm OD x 18.6 mm Belt, 14.9 mm from Hub to Center of 1st Groove, M16 x 1.5 Thread.

**APPLICATIONS:** Mercedes A-Class Water Cooled.

**Valeo 150 Amp. IR/IF Alternators.**

**ALTERNATOR #'S:** SG15L012, SG15L026; 439455.

**LESTER #'S:** 23171.



**39329**

**6-GROOVE LITENS RotorRx IDP**

**REPLACES:** 2601628A, 2601628B, 2605916, 2650151, 2650380, 2650491; Tendeco: 920746.


**DIMENSIONS:** 6 Groove, 44.0 mm L x 170 mm Bore x 61 / 69 mm OD x 10 mm from Hub to Center of 1st Groove, M16 x 1.5 Thread..

**APPLICATIONS:** Chevrolet Corvette 6.0L, 6.2L 2005-On.

**Valeo 150 Amp. IR/IF Alternators.**

**ALTERNATOR #'S:** TG15C046, TG15C089, TG15C107, TG15C139; FG15S061, FG15S083.

**LESTER #'S:** 13969, 13969A.



**39330**

**REPLACES:** 2601117.

**DIMENSIONS:** 6 Groove, 26.7 mm L x 170 mm Bore x 66.8 / 62.5 mm OD x 19.7 mm Belt.

**APPLICATIONS:** Nissan Quest 3.5L 2004-2007.

**Valeo 145 Amp. I/R Alternator.**

**ALTERNATOR #'S:** TG12C035, TG15C026, TG15C180, 2650047; Bosch Reman.: AL2401X.

**LESTER #'S:** 11018.



**39331**

**5-GROOVE LITENS RotorRx IDP**

**REPLACES:** 2650581A; Tendeco: 920843.


**DIMENSIONS:** 5 Groove, 49.0 mm L x 17 mm Bore x 644 / 56.3 mm OD x 17.3 mm Belt, 91 mm from Hub to Center of 1st Groove, M16 x 1.5 Thread.

**APPLICATIONS:** Pontiac Solstice / Saturn Sky 2.0L Turbo. **Valeo 145 Amp. IR/IF Alternators.**


**ALTERNATOR #'S:** TG15C14, TG15C159; 2650579.

**LESTER #'S:** 11263.


**VALEO**



**39332**  
**6-GROOVE CLUTCH PULLEY W/FREE WHEEL**  
**REPLACES:** 2655545; INA: F240026.03, 535013510;  
 IKA: 3-5441-1; Hyundai: K406643.  
**DIMENSIONS:** 6 Groove, 37.0 mm L x 17.0 mm Bore x  
 64.3 / 59.8 mm OD x 22.6 mm Belt, 8.8 mm from  
 Hub to Center of 1st Groove, M16 x 1.5 Thread.  
**APPLICATIONS:** Hyundai Tucson 2.0L, Sonata / Kia  
 Optima, Rondo 2.4L.  
**Valeo 110 Amp. Alternators.**  
**ALTERNATOR #'S:** TG11C076, TG11C087;  
 Bosch Reman.: AL4065X.  
**LESTER #'S:** 11189, 11491.



**39333**  
**6-GROOVE CLUTCH PULLEY W/FREE WHEEL**  
**REPLACES:** Denso: 72011-0750; INA: F233970.04,  
 535004610; IKA: 3-3564-1; Hyundai: 37322-27012.  
**DIMENSIONS:** 6 Groove, 35.2 mm L x 17.0 mm Bore x  
 64 / 59.5 mm OD x 22.2 mm Belt, 10.7 mm from  
 Hub to Center of 1st Groove, M16 x 1.5 Thread.  
**APPLICATIONS:** Hyundai Elantra, Santa Fe, Tucson 2.0L  
 2001-On, Kia Sportage 2.0L 2005-On.  
**Poong Sung for Denso 120 Amp. Alternators.**  
**ALTERNATOR #'S:** 02131-9110, -9111, -9112, -9311.  
**LESTER #'S:** 23090, 23098.




**39334**  
**6-GROOVE CLUTCH PULLEY W/FREE WHEEL**  
**REPLACES:** 593778; INA: F231142.08, 535004110.  
**DIMENSIONS:** 5 Groove, 35.0 mm L x 17.0 mm Bore x  
 56.0 / 61.0 mm OD x 22.3 mm Belt, 12.8 mm from  
 Hub to Center of 1st Groove, M16 x 1.5 Thread.  
**APPLICATIONS:** Audi A4 1.8L / 2.0L, VW Passat 1.9L  
 Turbo Diesel. **Valeo 120-150 Amp. Alternators.**  
**ALTERNATOR #'S:** SG12B047, SG12B075, SG14B010,  
 SG14B016, SG14B022, TG15C017, TG15C065.  
**LESTER #'S:** 11070, 23116, 23256.  
**NOTE:** This is the same Pulley as Bosch# 391012.



**39335**  
**REPLACES:** 593622.  
**DIMENSIONS:** 6 Groove, 31.2 mm L x 17.0 mm Bore x  
 51.8 / 46.5 mm OD x 23.2 mm Belt.  
**APPLICATIONS:** Mini Cooper 1.6L 2002-2006.  
**Valeo 120 Amp. I/R Alternator.**  
**ALTERNATOR #'S:** TG12S073, 439469.  
**LESTER #'S:** 11050.




**39336**  
**7-GROOVE CLUTCH PULLEY W/FREE WHEEL**  
**REPLACES:** 593960, 2603330; F239808.05, 535014010;  
 IKA: 353740; Mercedes: 642-150-06-60.  
**DIMENSIONS:** 7 Groove, 49.5 mm L x 17.0 mm Bore x  
 55.0 / 50.3 mm OD x 26 mm Belt, 19.6 mm from  
 Hub to Center of 1st Groove, M16 x 1.5 Thread.  
**APPLICATIONS:** Dodge Sprinter, Jeep Grand Cherokee,  
 Mercedes E / G-Class 3.0L Diesel 2007 - 2008.  
**Valeo 180-220 Amp. Alternators.**  
**ALTERNATOR #'S:** TG17C026, 028, 030, 030B, 046;  
 TG23C019; FG18S056; FG23S012; 437539,  
 439546, 439609; Bosch Reman.: AL0843X.  
**LESTER #'S:** 11306, 11457.




**39337**  
**6-GROOVE CLUTCH PULLEY W/FREE WHEEL**  
**REPLACES:** 265031900; INA: F554755, 535013710;  
 Nissan: 23151JA02A, EC49252.  
**DIMENSIONS:** 6 Groove, 37.9 mm L x 17.0 mm Bore x  
 58.0 / 52.6 mm OD x 22.7 mm Belt, 8.0 mm from  
 Hub to Center of 1st Groove, M16 x 1.5 Thread.  
**APPLICATIONS:** Nissan Altima, Sentra 2.5L 2007-08.  
**Valeo 110-120 Amp. Alternator.**  
**ALTERNATOR #'S:** TG11S092, TG11S102, TG11S110;  
 TG12C032, TG12C116, TG12S041.  
**LESTER #'S:** 11258, 11458, 13939V.




**39338**  
**DIMENSIONS:** 5 Groove, 26.0 mm L x 17.0 mm Bore x  
 65.0 mm OD x 20 mm Belt.  
**APPLICATIONS:** Kia Sorento 3.5L 2003-2006.  
**Korean Valeo 120 Amp. IR/IF Alternators.**  
**ALTERNATOR #'S:** A0002655045, 2655045;  
 Bosch Reman.: AL4234X.  
**LESTER #'S:** 11012.




**39339**  
**6-GROOVE CLUTCH PULLEY W/FREE WHEEL**  
**REPLACES:** 595203, 591578, 593539, 593904;  
 BMW: 12-31-7-516-105, -536-950, -550-001,  
 -570-152; INA: F238005.02, F230329, 535012710;  
 IKA: 353071.  
**DIMENSIONS:** 6 Groove, 38.2 mm L x 17.0 mm Bore x  
 49.6 / 53.5 mm OD x 22.5 mm Belt, 11.8 mm from  
 Hub to Center of 1st Groove, M16 x 1.5 Thread.  
**APPLICATIONS:** BMW 525 / 530 Series 3.0L 2006-2007.  
**Valeo 110-170 Amp. Alternators.**  
**ALTERNATOR #'S:** SG11B010, SG12B044, SG12B065,  
 SG14B017, TG17C015, TG17C065; 439560.  
**LESTER #'S:** 11260, 23233, 23234, 23250.



**39340**  
**7-GROOVE CLUTCH PULLEY W/FREE WHEEL**  
**REPLACES:** 2655703; INA: F232774.03, .04; 535007910;  
 IKA: 353891; Hyundai: 37322-4A000; K406701.  
**DIMENSIONS:** 7 Groove, 40.8 mm L x 17.0 mm Bore x  
 68.8 / 74.0 mm OD x 26.4 mm Belt, 9.0 mm from  
 Hub to Center of 1st Groove, M16 x 1.5 Threads.  
**APPLICATIONS:** Kia Sorento 2.5L Turbo Dsl. 2002-On.  
**Mando / Korean Valeo 110 Amp. Alternator.**  
**ALTERNATOR #'S:** TA000A62401; Mando: AF111393.  
**LESTER #'S:** 23791.



**39341**  
**6-GROOVE CLUTCH PULLEY W/FREE WHEEL**  
**REPLACES:** 593832, 2601052, 2603530; INA: F236591,  
 535006210; IKA: 335791; Fiat: 77363468;  
 Peugeot: 57054F.  
**DIMENSIONS:** 6 Groove, 38.2 mm L x 17.0 mm Bore x  
 54.2 mm OD x 22.7 mm Belt, 12.9 mm from Hub  
 to Center of 1st Groove, M16 x 1.5 Thread.  
**APPLICATIONS:** Citroen, Fiat, Peugeot Applications.  
**Valeo 97-150 Amp. IR/IF Alternators.**  
**ALTERNATOR #'S:** A13V1251, SG10B048, TG9B026,  
 TG10B013; **TG15C020**, 028, 053; 439502, 439553.  
**LESTER #'S:** 23011, 23301, 24078, 24079, 24080.




**39343**  
**6-GROOVE CLUTCH PULLEY W/FREE WHEEL**  
**REPLACES:** 593920, 2604507, 591641; INA: F239779,  
 F552973, 535013010; VW: 06E903-119E, -119P  
**DIMENSIONS:** 6 Groove, 44.5 mm L x 17.0 mm Bore x  
 65 / 70 mm OD x 23.0 mm Belt, 13.7 mm from  
 Hub to Center of 1st Groove, M16 x 1.5 Thread.  
**APPLICATIONS:** Audi A4 Quattro / A6 Quattro 3.2L.  
**Valeo 150-180 Amp. IR/IF Alternators.**  
**ALTERNATOR #'S:** TG16C010, 011, 145; **TG17C023**, 044.  
**LESTER #'S:** 11160, 11162, 23829.



**39344**  
**DIMENSIONS:** 6 Groove, 26.5 mm L x 62 / 67 mm OD x  
 17 mm Bore x 23 mm Belt.  
**APPLICATIONS:** Hyundai Santa Fe, Sonata, Tiburon  
 2.7L, Kia Magnetis 2.7L.  
**Korean Valeo 110 Amp. IR/IF Alternators.**  
**ALTERNATOR #'S:** A0002655010, TG11C024, 439295;  
 Bosch Reman.: AL4052X.  
**LESTER #'S:** 11015.



**VALEO**




**39345**

**REPLACES:** 2655588.  
**DIMENSIONS:** 6 Groove, 32 mm L x 58 / 62 mm OD x 17 mm Bore x 20.5 mm Belt.  
**APPLICATIONS:** Hyundai Santa Fe, Sonata, Tiburon 2.7L, Kia Magnetis 2.7L 2004.  
**Korean Valeo 110 Amp. IR/IF Alternators.**  
**ALTERNATOR #'S:** 2655516, A0002655516; Bosch Reman.: AL4052X.  
**LESTER #'S:** 11020.




**39346**

**DIMENSIONS:** 4-Groove, 19.5 mm L x 60 / 64 mm OD x 17 mm Bore x 14.5 mm Belt.  
**APPLICATIONS:** Hyundai Santa Fe, Sonata 24L, Kia Optima 24L.  
**Korean Valeo 110 Amp. IR/IF Alternators.**  
**ALTERNATOR #'S:** A0002655009, TG11C028; Bosch Reman.: AL4068X.  
**LESTER #'S:** 11014.




**39347**

**6-GROOVE ISOLATOR DECOUPLER PULLEY**  
**REPLACES:** 593891; Tendeco: 920693; Litens: 2602389, INA: 535021210; IKA: 353011; GM: 93178273, 93192631; Opel: 55186280; Fiat: 77363954; Suzuki: 31771-85E00-000.  
**DIMENSIONS:** 6 Groove, 50.5 mm L x 170 mm Bore x 54.8 mm OD x 20.9 mm Belt, 8.6 mm from Hub to Center of 1st Groove, M16 x 1.5 Thread, Spline 17 x 20.  
**APPLICATIONS:** Opel Corsa, Fiat Punto, Suzuki Swift.  
**Valeo 70-90 Amp. IR/IF Alternators.**  
**ALTERNATOR #'S:** TG8S013, 016; TG9S015, 016, 021, 022, 027; 439523, 439524, 439615.  
**LESTER #'S:** 23922, 23924.




**39348**

**6-GROOVE CLUTCH PULLEY W/ FREE WHEEL**  
**REPLACES:** 593860, 2580146, 2600161, 2605442; INA: F237101.01; 535006310; IKA: 335801; GM: 93178273; Fiat: 55186280, 77362721.  
**DIMENSIONS:** 6 Groove, 381 mm L x 170 mm Bore x 54 / 59 mm OD x 22.8 mm Belt, 7.9 mm from Hub to Center of 1st Groove, M16 x 1.5 Thread.  
**APPLICATIONS:** Opel Corsa, Fiat Punto, Suzuki Swift.  
**Valeo 80-120 Amp. IR/IF Alternators.**  
**ALTERNATOR #'S:** TG8S012, 013, 014, 022, 023; TG9S010, 011, 015, 016, 021, 022, 027, 036, 038, 039, 040, 063; TG12S101.  
**LESTER #'S:** 22795, 23325, 23792, 23922, 23924.




**39349**

**6-GROOVE CLUTCH PULLEY W/ FREE WHEEL**  
**REPLACES:** 2613294, 2618008; INA: F563248.03; 535020310; IKA: 3-5474-1; GM: 55580127, 55579927; Opel: 1204293, 1204301;  
**DIMENSIONS:** 6 Groove, 38.3 mm L x 170 mm Bore x 53.7 / 59 mm OD, 9.8 mm from Hub to Center of 1st Groove, M16 x 1.5 Thread.  
**APPLICATIONS:** Chevrolet Cruze 14L 2011-2014, Opel Astra 14L.  
**Valeo 120 Amp. IR/IF Alternators.**  
**ALTERNATOR #'S:** TG12C137, 138, 184, 189; FG12S043, 048, 054, 065, 071.  
**LESTER #'S:** 11654.




**39350**

**6 GROOVE CLUTCH PULLEY W/ FREE WHEEL**  
**REPLACES:** 595282, 2604787; INA: F551406, 535012410; IKA: 353441; VW: 03G-903-119B; 045-903-119, 045-903-119A.  
**DIMENSIONS:** 6 Groove, 40.2 mm L x 170 mm Bore x 49.5 / 55.0 mm OD x 22 mm Belt, 14.5 mm from Hub to Center of 1st Groove, M16 x 1.5 Thread.  
**APPLICATION:** Audi A5 2.0L TDi 2008, TT 3.2L 2006-2008, VW Polo 14L, Eos 2.0L TDi 2006-2008, Passat 3.6L 2008-2011.  
**Valeo Alternators.**  
**ALTERNATOR #'S:** FG18T062, TG11C067; TG14C020, 023, 024, 044; TG15C149, 165; TG17C066.  
**LESTER #'S:** 11425, 11463.  
**NOTE:** This is the same Pulley as Bosch's 391060.



**39351**

**6-GROOVE CLUTCH PULLEY W/ FREE WHEEL**  
**REPLACES:** 595333; INA: F566311, F566311, 535020710; VW: 06E903-119Q; IKA: 3-5439-1.  
**DIMENSIONS:** 6 Groove, 44.3 mm L x 170 mm Bore x 60.4 / 65.3 mm OD, 17.3 mm from Hub to Center of 1st Groove, M16 x 1.5 Thread.  
**APPLICATIONS:** Audi A5, Q5 3.2L, S4 / S5 / Q5 3.0L.  
**Valeo 140-180 Amp. IR/IF Alternators.**  
**ALTERNATOR #'S:** TG14C018, TG15C094, FG20S017; 439657, 439659, 439795.  
**LESTER #'S:** 11461, 11462, 11800.



**39352**

**8-GROOVE CLUTCH PULLEY W/ FREE WHEEL**  
**REPLACES:** 595239, 2391585, 2603331; INA: F551657.01, 535011110; IKA: 3-5348-1; Mercedes: 642-150-07-60.  
**DIMENSIONS:** 8 Groove, 52.3 mm L x 170 mm Bore x 54 / 50.2 mm OD x 29 mm Belt, 19.4 mm from Hub to Center of 1st Groove, M16 x 1.5 Thread.  
**APPLICATIONS:** Mercedes GL, ML, R Class 3.0L Diesel.  
**Valeo 180 Amp. IR/IF Alternator.**  
**ALTERNATOR #'S:** TG17C032, 439583.  
**LESTER #'S:** 11309.



**39354**

**7-GROOVE CLUTCH PULLEY W/FREE WHEEL**  
**REPLACES:** 595264; F551893.  
**DIMENSIONS:** 7 Groove, 49.5 mm L x 170 mm Bore x 53.5 / 49.5 mm OD, 24 mm Belt, M16 x 1.5 Thread.  
**APPLICATIONS:** BMW X5.  
**Valeo 230 Amp. IF / IR Alternator.**  
**ALTERNATOR #'S:** TG23C013; 439603.



**39355**

**6 GROOVE CLUTCH PULLEY W/ FREE WHEEL**  
**REPLACES:** 2605074; INA: F556533, 535017810; IKA: 3-5419-1; BMW: 12-31-7-576-515.  
**DIMENSIONS:** 6 Groove, 40.2 mm L x 170 mm Bore x 49.2 / 54.0 mm OD x 22.6 mm Belt, 16.6 mm from Hub to Center of 1st Groove, Fitting Length 144 mm, M16 x 1.5 Thread.  
**APPLICATIONS:** Mini Cooper 1.6L 2007-2009, Copper S 1.6L R56 2006-On.  
**Valeo 120-150 Amp. IR/IF Alternators, Mitsubishi Alternators.**  
**ALTERNATOR #'S:** TG12C059, TG12C120, FT15T044, FT15T072; Mitsubishi: A3TG3691ZC, A3TG5291ZC.  
**LESTER #'S:** 11334, 23895.



**39356**

**6-GROOVE ISOLATOR DECOUPLER PULLEY**  
**REPLACES:** 2605529; Tendeco: 920915.  
**DIMENSIONS:** 6 Groove, 370 mm L x 170 mm Bore x 55.7 / 63.5 mm OD x 22.5 Belt, M16 x 1.5 Thread, Spline 17 x 20.  
**APPLICATIONS:** Chevrolet Camaro 3.6L 2010-2011.  
**Valeo 150 Amp. IR/IF Alternators.**  
**ALTERNATOR #'S:** FG15S018, 020, 026, 077, 081, 100; TG12C065, 066, 176, 177; 26055325, 2605326, 2605327, 2650329, 2650730, 2650740.  
**LESTER #'S:** 11485.




**39357**

**6-GROOVE ISOLATOR DECOUPLER PULLEY**  
**REPLACES:** 2610968; Tendeco: 920931.  
**DIMENSIONS:** 6 Groove, 38.0 mm L x 170 mm Bore x 67 / 73.5 mm OD x 25.0 mm Belt, M16 x 1.5 Thread, Spline 17 x 20.  
**APPLICATIONS:** Chevrolet Camaro 6.2L 2010-2011, Ford Focus 2.0L 2012.  
**Valeo 150 Amp. IR/IF Alternators.**  
**ALTERNATOR #'S:** FG15S027, FG15S046, FG15S109.  
**LESTER #'S:** 11487, 11618.


**VALEO**




**39359**  
**6 GROOVE LITENS IDP**  
**REPLACES:** Tendeco: 920026; Kia: 37320-2G700, Valeo: 2612071, 10528176.  
**DIMENSIONS:** 6-Groove.  
**APPLICATION:** Kia Sorento 2.0L, 2.0L Turbo, 24L 2012-2013. **Poonsung 110 Amp. IR Alternators.**  
**ALTERNATOR #'S:** 2612070; Kia: 37300-2G700, 37300-2G900, 37300-2G950.  
**LESTER #'S:** 11606, 11694.



**39360**  
**6-GROOVE CLUTCH PULLEY W/FREE WHEEL**  
**REPLACES:** 2607575A; INA: F567535, 535021710; Hyundai: 37322-2G500; IKA: 3-5483-1.  
**DIMENSIONS:** 6 Groove, 378 mm L x 170 mm Bore x 60.0 / 54.9 mm OD x 22.6 mm Belt, 8.9 mm from Hub to Center of 1st Groove, M16 x 1.5 Thread.  
**APPLICATIONS:** Hyundai Sonata 2.0L, Santa Fe 2.0L / 24L, Kia Optima, Sorento 2.0L / 24L. **Valeo 110-150 Amp. Alternators.**  
**ALTERNATOR #'S:** 2607928; **FG15S060**, 110; TG11C089; Hyundai 37300-2G500, 37300-2G600, 37300-2G850, 37300-2G855, 37300-2G900.  
**LESTER #'S:** 11493, 14006.

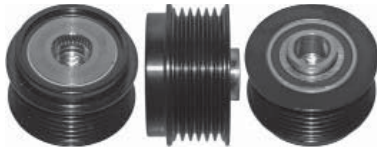

**39361**  
**6 GROOVE LITENS IDP**  
**REPLACES:** Tendeco: 920015; Hyundai: 37320-2E200, Valeo: 2610524.  
**DIMENSIONS:** 6-Groove, 41.0 mm L x 170 mm Bore x 57.7 mm OD x 21.7 mm Belt, 8.9 mm from Hub to Center of 1st Groove, M16 x 1.5 Thread.  
**APPLICATION:** Hyundai Elantra 1.8L 2012-2014, Kia Soul 2.0L, Forte 1.8L 2012-2014. **Valeo I/R Alternators.**  
**ALTERNATOR #'S:** 2610428; Valeo: **37300-2E200**, -2E250.  
**LESTER #'S:** 11610.

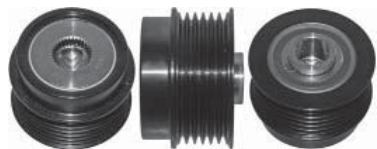

**39362**  
**6 GROOVE LITENS IDP**  
**REPLACES:** Tendeco: 920019; Hyundai: 37320-2B200, 37320-2B000; Valeo: 2610127; Facet: 9-9442.  
**DIMENSIONS:** 6-Groove, 45.0 mm L x 170 mm Bore x 53.0 mm OD x 20.5 mm Belt, 8.9 mm from Hub to Center of 1st Groove, M16 x 1.5 Thread.  
**APPLICATION:** Kia Soul 2.0L 2012-2013, Sportage 2.0L 2013. **Valeo 120 Amp. I/R Alternators.**  
**ALTERNATOR #'S:** 2610819; Hyundai: 37300-2E300.  
**LESTER #'S:** 11611.




**39363**  
**4 GROOVE LITENS IDP**  
**REPLACES:** Tendeco: 920021; Ford: CM5E10A352-CA, CM5E10A352-CB, CM5Z10344-C.  
**DIMENSIONS:** 4-Groove, 40 mm L x 17 mm Bore x 52 mm OD x 16 mm Belt, 13.5 mm from Hub to Center of 1st Groove, M16 x 1.5 Thread.  
**APPLICATION:** Ford Focus 2.0L 2012-2014. **Valeo 150 Amp. I/R Alternators.**  
**ALTERNATOR #'S:** FG15S065, 092; Ford: BV6T-10300-FA, BV6Z10346-E, -F, BV6T-10300-EA, GL-8675.  
**LESTER #'S:** 11617, 11653.



**39364**  
**6 GROOVE LITENS IDP**  
**REPLACES:** Tendeco: 920026; Kia: 37320-2G700, Valeo: 2612071, 10528176.  
**DIMENSIONS:** 6-Groove, 41.0 mm L x 170 mm Bore x 54.8 mm OD x 20.8 mm Belt, 13.0 mm from Hub to Center of 1st Groove, M14 x 1.5 Thread.  
**APPLICATION:** Hyundai Santa Fe 2.0L, Kia Sorento 2.0L, 24L. **Valeo 110-150 Amp. IR Alternators.**  
**ALTERNATOR #'S:** FG15S059; Kia: 37300-2G700, 37300-2G800, 37300-2G950.  
**LESTER #'S:** 11606.



**39365**  
**6-GROOVE ISOLATOR DECOUPLER PULLEY**  
**REPLACES:** Tendeco: 920020; Ford: CM5E10A352-AA, -AB, CM5Z10344-D, CP9Z10344-A; Facet: 9-9443.  
**DIMENSIONS:** 6 Groove, 38.0 mm L x 170 mm Bore x 52.0 mm OD x 21.0 mm Belt, 9.8 mm from Hub to Center of 1st Groove, M16 x 1.5 Thread.  
**APPLICATIONS:** Ford Focus S / SE 2.0L 2012. **Valeo 150 Amp. IR/IF Alternator.**  
**ALTERNATOR #'S:** FG15S046; Ford: CV6Z-10346-B; Motorcraft: GL-8651.  
**LESTER #'S:** 11618.




**39366**  
**REPLACES:** 595368.  
**DIMENSIONS:** 42.5 mm L x 49.6 / 54.8 mm OD x 17 mm Bore x 21.6 mm Belt, 6 Groove.  
**APPLICATIONS:** Mercedes C350, E350, ML350 / ML450, R350, SLK350 3.5L, GL450 4.5L, CL550 4.6L, GL550, ML550 5.5L. **Valeo 180-250 Amp. Alternators.**  
**ALTERNATOR #'S:** CG20U015, 029; **CG25S020**, 022, 026, 036, 041, 045; **FG18S016**, 029, 032, 046, 077, 083, 097, 110, 127, 128, 144; **FG23S013**, 021, 027, 049; TG15C181, TG15C182, TG23C034.  
**LESTER #'S:** 11455, 11581, 11711, 11804, 11808.




**39368**  
**6 GROOVE LITENS IDP**  
**REPLACES:** Tendeco: 920135; Litens: 1001135; INA: 535027610; IKA: 3-5491-1; VW: 06H-903-119C, 06H-903-201G.  
**DIMENSIONS:** 6-Groove, 42.3 mm L x 170 mm Bore x 56.2 / 60.5 mm OD x 23.0 mm Belt, 12.6 mm from Hub to Center of 1st Groove, M16 x 1.5 Thread.  
**APPLICATION:** Audi A4 / A4 Quattro, A5 Quattro, A6 / A6 Quattro, Allroad, Q5 2.0L 2013-2015. **Valeo EG18 (180 Amp.), FG20 (200 Amp.), EG21 (210 Amp.) Series Alternators.**  
**ALTERNATOR #'S:** FG20S015; VW: 06H-903-017K.



**39369**  
**6 GROOVE LITENS IDP**  
**REPLACES:** Tendeco: 920047; Toyota: 27415-0T030, 27415-0T031.  
**DIMENSIONS:** 6-Groove, 44.95 mm L x 170 mm Bore x 55.2 mm OD, M16 x 1.5 Thread, 17 x 20 Spline.  
**APPLICATION:** Toyota Corolla 1.8L 2014-2015. **Valeo FG12T (120 Amp.) Series Alternator.**  
**ALTERNATOR #'S:** FG12T050; Toyota: 27060-0T230.



**39370**  
**6 GROOVE CLUTCH PULLEY W/ FREE WHEEL**  
**REPLACES:** 2611851; INA: F575777, 535026510.  
**DIMENSIONS:** 6 Groove, 42.2 mm L x 170 mm Bore x 501 / 55.0 mm OD x 22.6 mm Belt, 15.5 mm from Hub to Center of 1st Groove, Fitting Length 144 mm, M16 x 1.5 Thread.  
**APPLICATIONS:** Nissan Sentra, Versa 2.0L 2007-2014. **Valeo 120 Amp. IR/IF Alternator.**  
**ALTERNATOR #'S:** FG12T039; Nissan: 23100-3SH2B.  
**LESTER #'S:** 11673.



**39371**  
**6 GROOVE CLUTCH PULLEY W/ FREE WHEEL**  
**REPLACES:** 2604126, 2604640; INA: F552901; 535016810; Mercedes: 278-150-00-60, 646-155-01-15; IKA: 3-5391-1.  
**DIMENSIONS:** 6 Groove, 45.8 mm L x 170 mm Bore x 49.7 / 54.6 mm OD x 22.6 mm Belt, 194 mm from Hub to Center of 1st Groove, Fitting Length 144 mm, M16 x 1.5 Thread.  
**APPLICATIONS:** Mercedes C350, E350, GLK350, SLK350, Sprinter. **Valeo 120-220 Amp. Alternators.**  
**ALTERNATOR #'S:** TG12C063; TG15C130, 131, 133; **TG17C041**, 061; **TG23C017**, 022; **FG15T036**, 049; FG18D037; **FG18S012**, 047, 061, 073, 098, 099, 130; CG20U025; **CG25U025**, 028, 039.  
**LESTER #'S:** 11716, 11738, 11807, 11812, 11813, 11814, 11822, 11823, 20091, 22721, 23290.

**PULLEY COVERS**



**39994**

**REPLACES:** INA: 225556.51.  
**DIMENSIONS:** 48.8 mm OD .  
**APPLICATIONS:** Denso Clutch Pulleys.  
**LESTER #S:** 23313, 23317, 23558.



**39995**

**REPLACES:** Tandeco: 920918.  
**DIMENSIONS:** 47.0 mm OD .  
**APPLICATIONS:** Denso, Valeo Litens Isolator Decoupler Pulleys.  
**LESTER #S:** 11136, 11137, 11196, 11202, 11252, 11323, 11325, 11326, 11367, 11400, 11402, 11404, 11408, 11456, 11485, 11487, 11491, 11492, 11514, 11517, 11570, 11572, 11573, 11604, 11670, 11701.




**39996**

**REPLACES:** Tandeco: 920798.  
**DIMENSIONS:** 44.5 mm OD .  
**APPLICATIONS:** Bosch, Denso, Mitsubishi Litens RotorRx Isolator Decoupler Pulleys.  
**LESTER #S:** 11063, 11088, 11195, 11231, 11236, 13870, 13871.



**39997**


**REPLACES:** Tandeco: 920732.  
**DIMENSIONS:** 51.7 mm OD .  
**APPLICATIONS:** Bosch, Denso, Mitsubishi, Valeo Litens RotorRx Isolator Decoupler Pulleys.  
**LESTER #S:** 11063, 11109, 11114, 11115, 11136, 11137, 12370, 12379, 13864, 13870, 13871, 13960, 13961, 13969, 13969A.



**39999**

**REPLACES:** F225653-0091; Bosch: 1-120-591-506; BMW: 11-28-172-7159; Delphi: 10484671; J. Deere: AL78936; Mercedes: 000-151-10-02; Porsche: 996-603-153-50; Valeo: 2546971-A; Visteon: XW4U-10325-AA; Volvo: 9442945; VW: 037-145-291.  
**DIMENSIONS:** 55.5 mm OD x 4.7 mm.  
**APPLICATIONS:** Bosch, Delco AD237 Series, Ford 6G Series, Mitsubishi, Valeo Clutch Pulleys.  
**LESTER #S:** 8241, 8255, 8257, 8278, 8293, 8489, 11022, 11041, 11064, 11081, 11130, 11134, 11209, 11210, 12382, 12383, 13801, 13831, 13832, 13833, 13849, 13851, 13853, 13954, 13996, 13998, 21391, 22886.

**NEW PULLEYS**



**391069**

**7 GROOVE CLUTCH PULLEY W/ FREE WHEEL**  
**REPLACES:** F00M-349-878; F-00M-349-108, -121, -125; INA: F556174, 535012810; IKA: 3-5338-1; Mazda: U201-18-W10; Toyota: 27415-0L040.  
**DIMENSIONS:** 6-Groove, 37.7 mm L x 17.0 mm Bore x 58.9 mm OD x 26.2 mm Belt, 8 mm from Hub to Center of 1st Groove, M16 x 1.5 Thread, 111 mm Fitting Depth.  
**APPLICATION:** Ford Transit, Land Rover Defender 24L, Mazda Pickup B22 2.2L, Toyota Hilux.  
**Bosch 150-210 Amp. I/R Alternators.**  
**ALTERNATOR #S:** 0-121-615-003, -103; 0-124-315-046; 0-125-711-005, -018, -046, -049, 103, -104, -133, -134; 0-125-811-015, -016, -085, -086.  
**LESTER #S:** 20035, 20415, 23977.



**39568**

**7 GROOVE LITENS IDP**  
**REPLACES:** Tandeco: 920037; Honda: 31141-5X6J01.  
**DIMENSIONS:** 7-Groove, 41.0 mm L x 17.0 mm Bore x 57.8 mm OD x 24.5 mm Belt, 9.2 mm from Hub to Center of 1st Groove, M14 x 1.5 Thread.  
**APPLICATION:** Acura TLX 24L 2015, Honda CR-V 24L 2015-2016, Accord 24L / 3.5L 2013-2014, Civic 2.0L 2016. **Mitsubishi 110 Amp. I/R Alternator.**  
**Denso 120-135 Amp. Hairpin I/R Alternators.**  
**ALTERNATOR #S:** Mitsubishi: A5TL0581, A5TL0581ZC; Denso: 104210-1530, 104211-3910, 104211-8300; Honda: AGHA88, CSP47, CSP91; **31100-5A2-A02, -5A2-A02RM, -5BA-A01, -5G0-A02, -RX0-A01, -RX0-A01RM, -5X6J01, -5X6J01RM.**  
**LESTER #S:** 11604, 11670, 14489.  
**NOTE:** Cap 39995.



**39603**

**6 GROOVE LITENS IDP**  
**REPLACES:** Tandeco: 920050; Hyundai: 37320-2B050; Delco: 10535755; Valeo: 2618084.  
**DIMENSIONS:** 6-Groove, 44.7 mm L x 17.0 mm Bore x 58.2 mm OD x 22.0 mm Belt, 9.0 mm from Hub to Center of 1st Groove, M16 x 1.5 Thread.  
**APPLICATION:** Hyundai Elantra 1.8L / 2.0L 2014-2015.  
**Korean Delco 130 Amp. IR / IF Alternator.**  
**Valeo 150 Amp. IR / IF Alternator.**  
**ALTERNATOR #S:** Valeo: 2619086; Delco: 8400320; Hyundai: 37300-2E700, 37300-2E800.  
**LESTER #S:** 8543, 11701.  
**NOTE:** Cap 39995.